

GENERAL DESCRIPTION

- Chassis
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- Top :
AISI 430 Ti stainless steel top 3 mm thick with a 55 mm high edge and return to underside
- General :
AISI 304 side and front panels 1.2 mm thick
Bright polished stainless steel corner column 1.2 mm thick
Chrome coated dial indicator and knob



APPLIANCE DESCRIPTION

- Top :
1 fryer 2x7l 2x8 kW
- Fryer
2x7 litre capacity 1 mm thick AISI 304 tanks with cold and heat zones.
20 mm high edge to prevent debris from falling in the cooking oil
 - . oil level warning marks
 - . drain tap underneath the tank
 - . Removable lid in AISI 304 stainless steel, 1 mm thick
 - . Electric heating : with removable immersion element rated 8 kW each
- Control and safety :
 - . on/off switch, control thermostat and indicator lights
 - . safety thermostat with manual reset
 - . safety microswitch to cut power to the element when removed
- Accessory : 2 nickel coated fryer baskets
- Base :
Technical cupboard.
Hinged door and inner door in stainless steel with magnetic hasps and handle

EXTEND
Concept



Gas Nat G20/20 :

Gas Propane G31/37 : .

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
GMC 0045	525 x 1000 x 900	3-400 V + E	ELEC 16 KW	.

OPTIONS	CODE
1 Socket 1-230 V	GMC 0117
2 Sockets 1-230 V	GMC 0118
.	.
.	.
.	.
.	.
.	.
.	.

ACCESSORIES	CODE
Top extension kit	GMC 0075
Rear filler strip kit	GMC 0097
Joining kit for 2 modules	GMC 0074

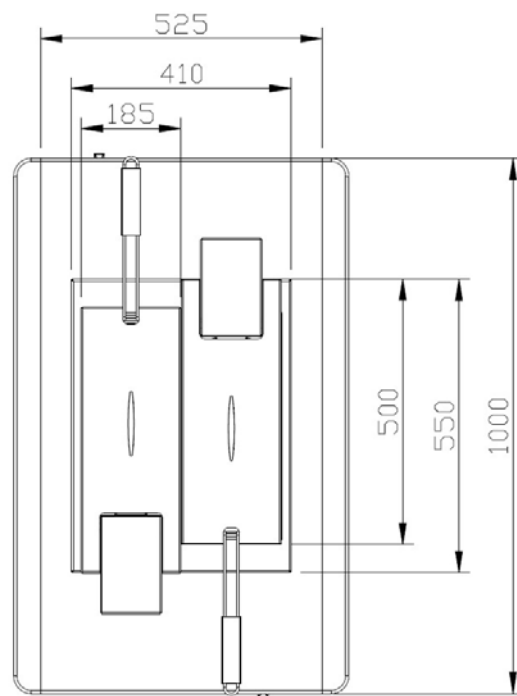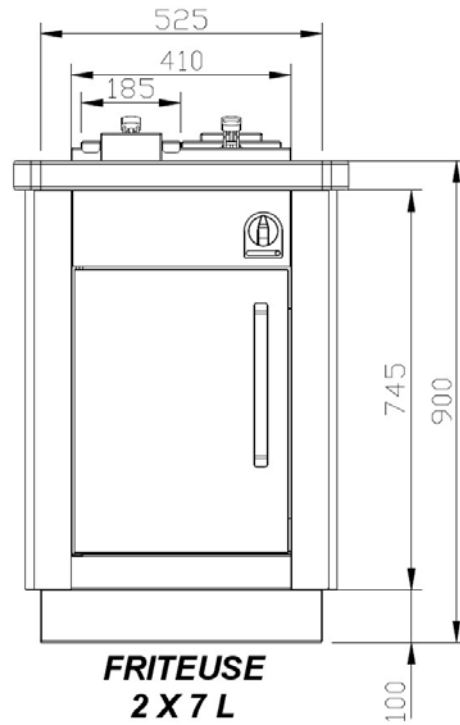

Technical characteristics are indicative only and can be modified from Charvet Co. without notice.

