

2 BURNERS

BRIDGE UNIT GN 1/1

GENERAL DESCRIPTION

- Chassis :

. one-piece seam welded stainless steel chassis 3 mm thick duct at the back.

- Top :


. AISI 430 Ti stainless steel top 3 mm thick with a 55 mm high edge and return to underside.

- General :

. AISI 304 side and front panels 1.2 mm thick.

. Bright polished stainless steel corner column 1.2 mm thick.

. Chrome coated dial indicator and knob.

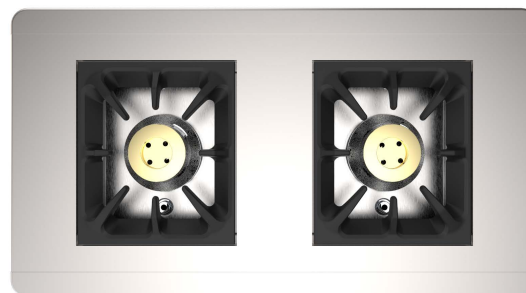

APPLIANCE DESCRIPTION

- Top :

. 2 burners under cast iron grids 350 x 300 mm 100 mm space between grids.

- 2 burners :

. I.System "double-crown" burner with central flame, and rated 8 kW; heavy brass cap and treated anti-corrosion cast iron body; electric ignition.

. Pilot light with overflow protection, safety thermocouple, recessed low <> high heat controls.

. AISI 304 stainless steel removable drip tray; enamelled water tank completed with 2 burners and manual overflow plug (requires connection to the drainage system).

. **Provide connection to wastewater.**



Natural gas flow
G20/20 :

Propane gas flow
G31/37 :

CODE	DIMENSIONS	CAPACITY	POWER SUPPLY	POWER	WEIGHT
GMC0189	450 x 1000 x 280 mm	-	Electricity 1-230 V + N + E	GAS 16 kW	- Kg

OPTIONS	CODE
Hinged doors - for pass-through GN 2/1 cupboard	GMC0149
Pass-through GN 2/1 hot cupboard - rated 1,8 kW	GMC0147
1 electric socket 1~230V+ E	GMC0117
2 electric sockets 1~230V + E (on each face)	GMC0118
Electric ignition, water tank - for open burners	Included
Water tank under high heats	Included
Burner "IS ECO" - replace 1 standard burner	GMC0183
-	-
-	-
-	-

ACCESSORIES	CODE
Top extension kit - for a central cooking suite	GMC0075
Rear filler strip kit - for module installed against a wall	GMC0097
Joining kit for 2 modules - module assembly	GMC0074

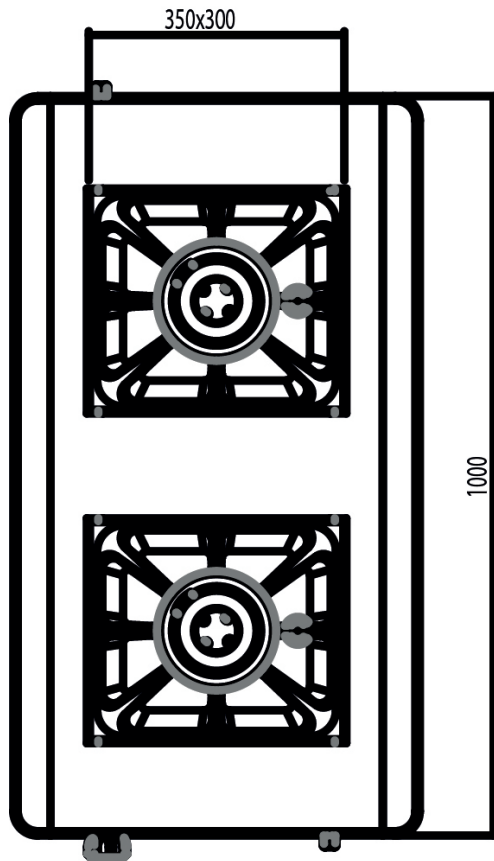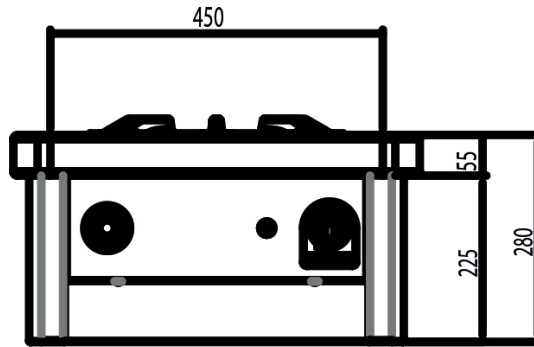

Technical characteristics are indicative only and can be modified from Charvet Co. without notice.

