

## BAIN-MARIE GN 4/3

## OPEN CUPBOARD GN 1/1

### GENERAL DESCRIPTION

**- Chassis :**

. one-piece seam welded stainless steel chassis 3 mm thick duct at the back.

**- Top :**


. AISI 430 Ti stainless steel top 3 mm thick with a 55 mm high edge and return to underside.

**- General :**

. AISI 304 side and front panels 1.2 mm thick.

. Bright polished stainless steel corner column 1.2 mm thick.

. Chrome coated dial indicator and knob.

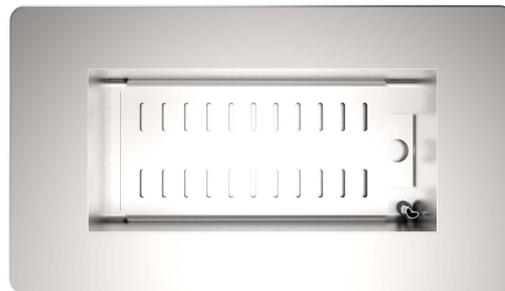

### APPLIANCE DESCRIPTION

**-Top :**

. Bain-marie GN 4/3.

**-Boiled bain-marie :**

. Tank in 20/10 AISI 304 stainless steel. Removable perforated base tray - over- flow tube for floor connection + valve in base. Water-jet filling and control to front (requires connection to the drainage system).

. Power 2 kW driven by energy regulator (0-100%) with 'STOP' position and thermostat.

. Resistor placed under the bain-marie tank.

. Removable stainless steel lid.

**-Open cupboard :**

. Open cupboard GN 1/1, rounded corners in the lower part, and removable ladders.



Natural gas flow  
G20/20 :

Propane gas flow  
G31/37 :

CODE	DIMENSIONS	CAPACITY	POWER SUPPLY	POWER	WEIGHT
<b>GMC0233</b>	450 x 1000 x 900 mm	-	electricity 1-230 V + N + E	ELEC 2 kW	- Kg

OPTIONS	CODE
Hinged doors - for open base	GMC0149
Pass-through GN 1/1 hot cupboard - rated 1,2 kW	GMC0147
1 electric socket 1~230 V + E	GMC0117
2 electric sockets 1~230V + E (1 on each face)	GMC0118
Open base - for 450 mm module only base closure	GMC0208
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Top extension kit - for a central cooking suite	GMC0075
Rear filler strip kit - for module installed against a wall	GMC0097
Joining kit for 2 modules - module assembly	GMC0074

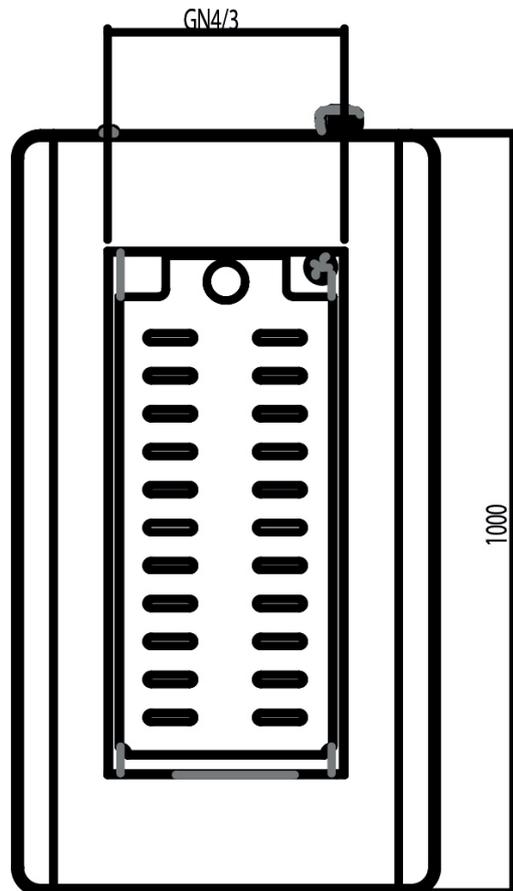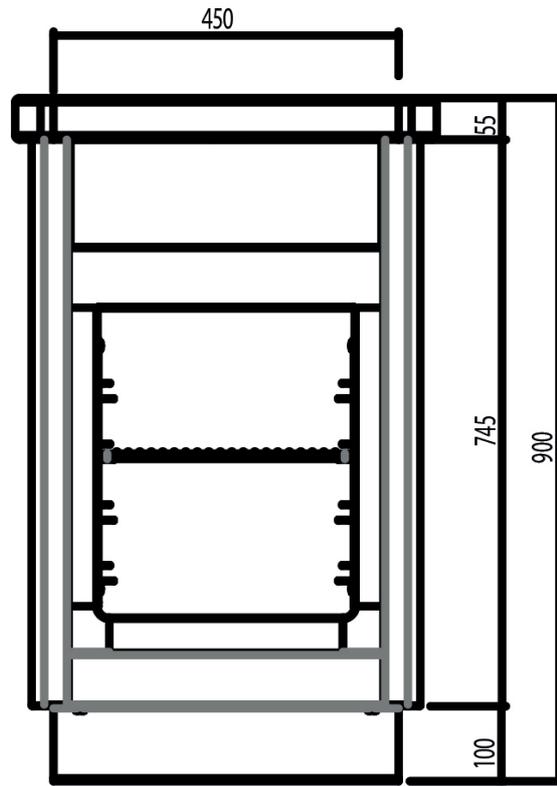

Technical characteristics are indicative only and can be modified from Charvet Co. without notice.

