

2 RADIANT HOBS

OPEN CUPBOARD GN 1/1

GENERAL DESCRIPTION

- Chassis :

. One-piece seam welded stainless steel chassis 3 mm thick duct at the back.

- Top :

. AISI 430 Ti stainless steel top 3 mm thick with a 55 mm high edge and return to underside.

- General :

. AISI 304 side and front panels 1.2 mm thick.
. Bright polished stainless steel corner column 1.2 mm thick.
. Chrome coated dial indicator and knob.



APPLIANCE DESCRIPTION

- Top :

. 2 Heating zones.

- 2 heating zones :

. measuring 300 x 300 mm. Rated 2 x 4 kW.
. Silkscreen ceramic plate measuring 370 x 690 mm, 6-mm thick, and lined-up with the top. . Switches and "ON" indicators - potentiometer control switch and safety thermostat.

- Open cupboard :

. Open cupboard GN 1/1, rounded corners in the lower part and removable ladders.



Natural gas flow
G20/20 :

Propane gas flow
G31/37 :

CODE	DIMENSIONS	CAPACITY	POWER SUPPLY	POWER	WEIGHT
GMC0239	450 x 1000 x 900 mm	-	electricity 3-400 V + N + E	ELEC 8 kW	- Kg

OPTIONS	CODE
Hinged doors - for pass-through GN 2/1 cupboard	GMC0149
Pass-through GN 1/1 hot cupboard - rated 1,2 kW	GMC0147
1 electric socket 1~230V + E	GMC0117
2 electric sockets 1~230V + E - 1 on each face	GMC0118
Open base - for 450 mm module only base closure	GMC0208
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Top extension kit - for a central cooking suite	GMC0075
Rear filler strip kit - for module installed against a wall	GMC0097
Joining kit for 2 modules - module assembly	GMC0074

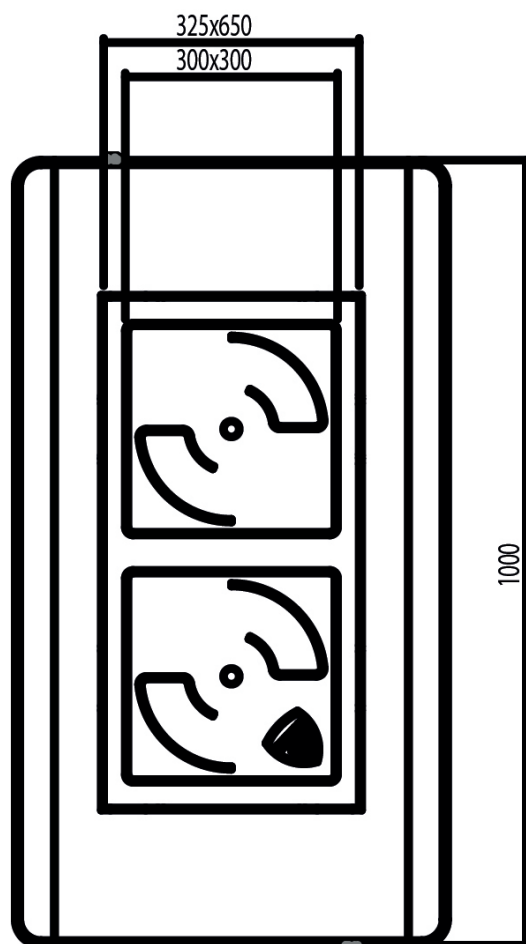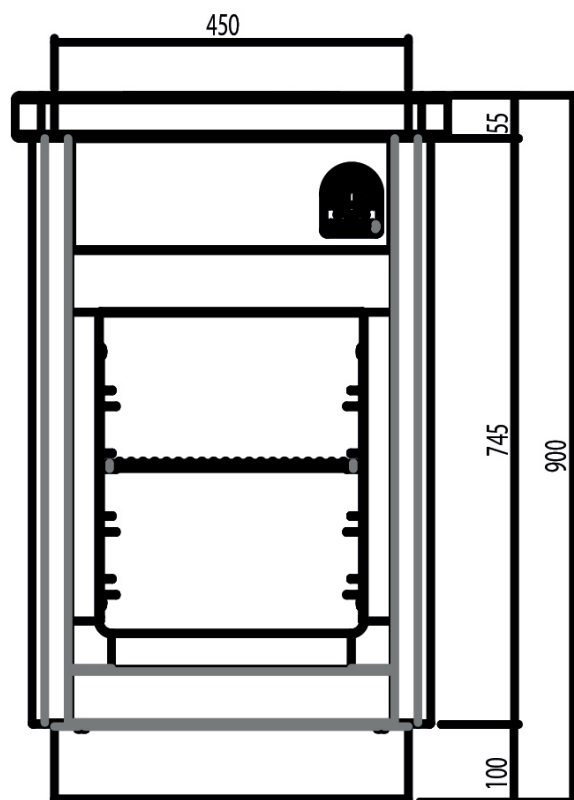

Technical characteristics are indicative only and can be modified from Charvet Co. without notice.

