

FRYER 2 x 7 L

1 Door + Technical cupboard

GENERAL DESCRIPTION

- Chassis :


. One-piece seam welded stainless steel chassis 3 mm thick duct at the back.

- Top :

. AISI 430 Ti stainless steel top 3 mm thick with a 55 mm high edge and return to underside.

- General :

. AISI 304 side and front panels 1.2 mm thick.
 . Bright polished stainless steel corner column 1.2 mm thick.
 . Chrome coated dial indicator and knob.

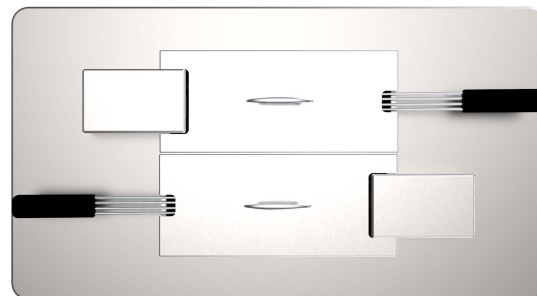

APPLIANCE DESCRIPTION

- Top :

. 1 fryer 2 x 7 L.

- Fryer :

. 2 pressed AISI 304 stainless steel tanks, one control on each side.
 . 8 kW immersion element with thermostat control, 3-400V+ N + E - high limit safety thermostats. Production tank 18 kg / h per tank.
 . 1/4 turn drain tap + drain tank with filter mesh in cupboard base (included door).
 . Safety thermostat.
 . Removable resistances for cleaning.
 . Safety outside tank.

- Open cupboard :

. Accessories : 1 basket 1,2 kg (fries) per tank.



Natural Gas Flow
G20/20 :

Propane Gas Flow
G31/37 :

CODE	DIMENSIONS	CAPACITY	POWER SUPPLY	POWER	WEIGHT
GMC0242	450 x 1000 x 900 mm	2 x 7 LITERS	electricity 3-400 V + N + E	ELEC 16 kW	- Kg

OPTIONS	CODE
Hinged door - for open base	N.A
Pass-through GN 1/1 hot cupboard - rated : 1,2 kW	N.A
1 electric socket 1~230V+E	GMC0117
2 electric sockets 1~230V +E	GMC0118
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Top extension kit - for a central cooking suite	GMC0075
Rear filler strip kit - for module installed against a wall	GMC0097
Joining kit for 2 modules - module assembly	GMC0074

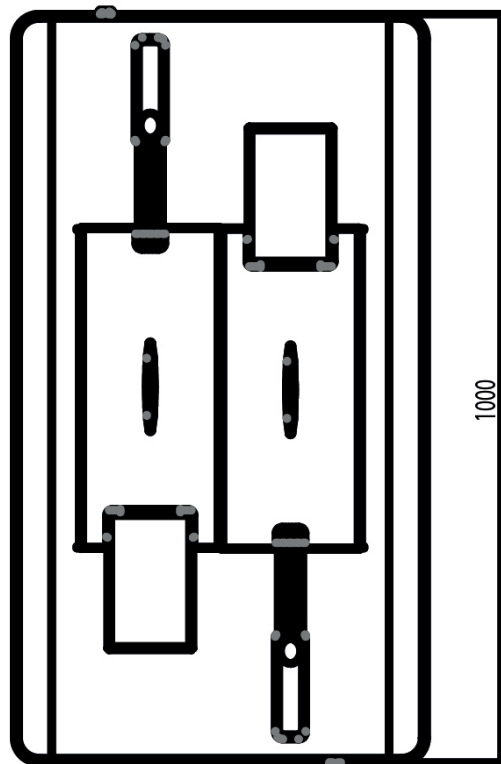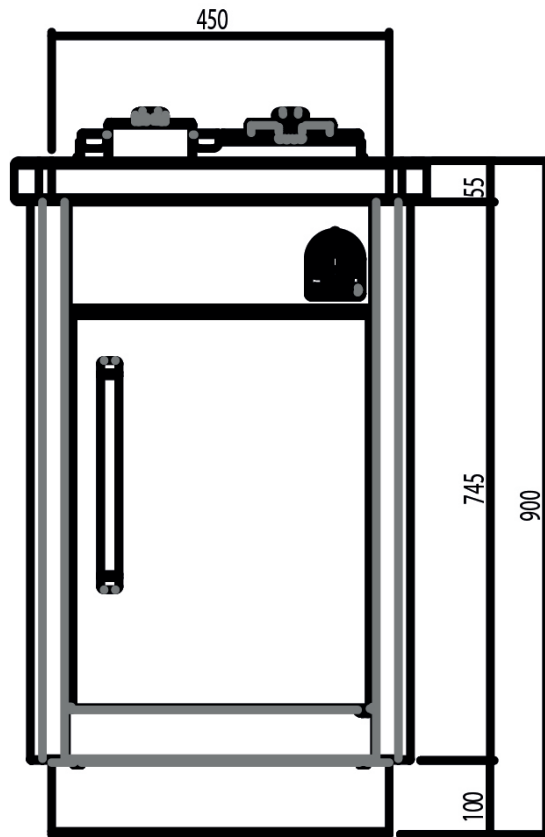

Technical characteristics are indicative only and can be modified from Charvet Co. without notice.

