



FULL MODULE UNIT - 4 OPEN BURNERS

OPEN BASE

Pro 900

Summary

Energy :
GAS

Code :
V01458

Designation :
B-G4FN

Dimensions (W x D x H) :
850 x 900 x 900 mm
Power : 33 kW (gas)
Voltage/Electric p. :
Weight :

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Top :

- . 2 sets of 2 open burners under cast iron pan support measuring 420 x 300 mm
- . "crown" "I.SYSTEM" burner rated 10 kW (front) and 6.5kW (back), with flame failure safety cut out thermocouple - Pilot ignition: "stop - ignition - full fire - idle" valves with clearance adjustment.
- . removable enamelled steel drip pans.
- . 1 stainless steel wire grid reducer.
- . Enamelled removable spillage tray.
- . Lower 18-10 stainless steel spillage drawer.

Base :

- . Open base with a 18-10 stainless steel removable 2-pieces floor.

Natural gas flow G20/20 :

3,49








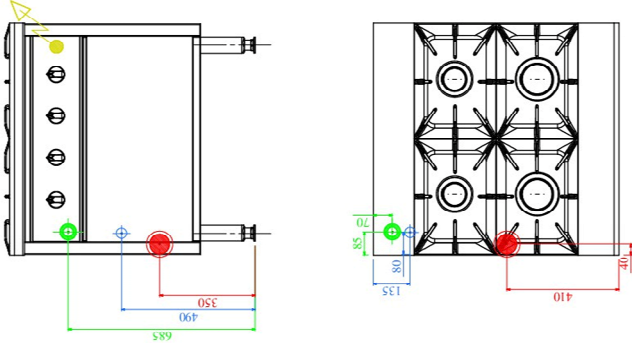
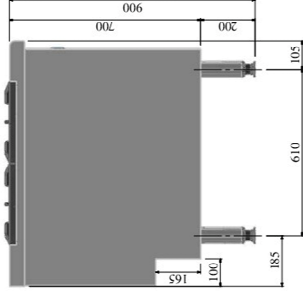
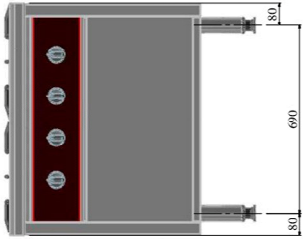
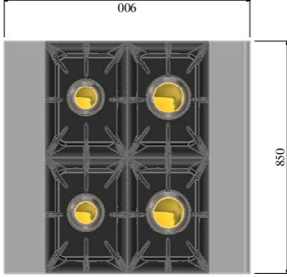















Propane gas flow G31/37 :

2,56

OPTIONS	CODE
Electric hot cupboard 4xGN2/1 in base 3-400V+N+E/2,25 kW-therm. 0-30/110°C	V00826
Hinged doors - for open base	V01576
Removable water tank 1-230V+E/0,008kW	V02409
Electric spark ignition 1-230V+E/0,002 kW	V01014
'Double-crown' burner 8 kW In place of 1 standard burner	V02459
"IS-ECO" burner In place of 2 standard burners 1-230 V + E	V02890
S/S rear panel fitted in factory W : 840 x H: 645 mm	V01182

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V01187



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Optionen Ausstattunge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Wasserzulauf Wasserzulauf (gefiltertes wasser ≤ 3bars-7°F) Conexión agua ≤ 3 bars-7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserlauf desagüe</p>										
																
   <table border="1" data-bbox="1090 875 1246 1234"> <tr> <td></td> <td>Ø 15x21 (1/2")</td> </tr> <tr> <td></td> <td>1 ~ 230V + PE Ø1.50mm²</td> </tr> <tr> <td></td> <td>Ø 8x13 (1/4")</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td></td> <td>Ø 20x27 (F3/4")</td> </tr> </table>								Ø 15x21 (1/2")		1 ~ 230V + PE Ø1.50mm ²		Ø 8x13 (1/4")				Ø 20x27 (F3/4")
	Ø 15x21 (1/2")															
	1 ~ 230V + PE Ø1.50mm ²															
	Ø 8x13 (1/4")															
																
	Ø 20x27 (F3/4")															
<p>v01458 PRO00B-G4FN</p>																



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

