



FULL MODULE UNIT - 2 SMALL SOLID TOPS

GAS OVEN GN 2/1

Pro 900

Summary

Energy : GAS	Code : V01459	Designation : G2PL	Dimensions (W x D x H) : 850 x 900 x 900 mm Power : 25 kW (gas) Voltage/Electric p. : 1~230V+E/0,1 Weight :
------------------------	-------------------------	------------------------------	---

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Top : 2 hotplates








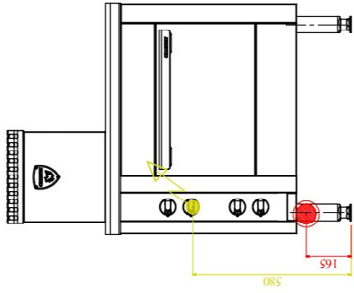
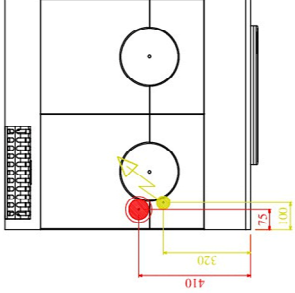
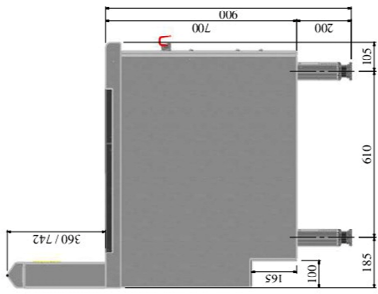
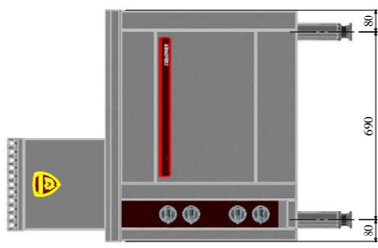
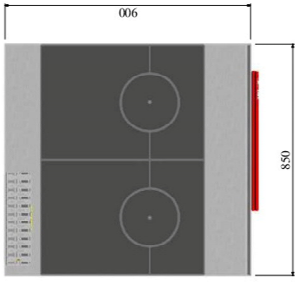

- . Cast iron solid tops measuring 420 x 600 mm with off-center buffer.
 - . "crown" burner rated 7 kW, with flame failure safety cut out thermocouple - Pilot ignition- "stop - ignition - full fire - idle" valve with backlash adjustment.
 - . Removable refractory elements in stainless steel formwork.
 - . 18-10 stainless steel cleanliness drawer.
- Base : static gas oven GN 2/1
- . measuring L : 530 x D : 630 x H : 300 mm
 - . "H" type burner in enamelled steel, power 11 kW, with flame failure safety cut out thermocouple - Pilot ignition. Stop-start-stop valve and regulation thermostat 50 - 300 ° C.
 - . 4 mm thick steel sole / stainless steel muffle with high density insulation.
 - . Removable runners in enamelled steel, 3 levels of guides spaced 70 mm apart.
 - . door and storm door in 18-10 stainless steel, with high density insulation, enamelled steel handle on anodized aluminum supports, ensuring thermal break.

Natural gas flow G20/20 :	2,64
Propane gas flow G31/37 :	1,94

OPTIONS	CODE
Electric spark ignition 1-230V+E/0,002 kW	V01014
S/S rear panel fitted in factory W : 840 x H : 645 mm	V01182
	0

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V01187



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Optionen Ausstattung Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Wasserzulauf Wasserzulauf (gef. filtertes wasser) ≤ 3bars-7°F Conexión agua ≤ 3 bars-4.7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
					<p>Ø 15x21 (1/2") 1-230V + PE Ø1.50mm²</p>	<p>+ 2,50 m de câble électrique</p>
						<p>V01459 PRO0002PL</p>



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

