



# FULL MODULE UNIT - 2 SMALL BURNERS + 1 SMALL SOLID TOP

## GAS OVEN GN 2/1

# Pro 900

### Summary

**Energy :**

**GAS**

**Code :**

**V01463**

**Designation :**

**G3FN/PL**

**Dimensions (W x D x H) :**  
**850 x 900 x 900 mm**  
**Power : 34,5 kW (gas)**  
**Voltage/Electric p. : 1~230V+E/0,1**  
**Weight :**

## DEVICE DESCRIPTION

### General description

**Chassis :**

**Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.**

**Top :**

**Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.**

**Base :**

**Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).**

**Top :**

- . 2 open burners under cast iron grates of : 420 x 300 mm.
- . crown type "I.SYSTEM" burners, power: 10 kW at the front and 6.5 kW at the rear, with pilot lights and thermocouple safety.
- . "stop - ignition - full fire - idle" valves with clearance adjustment.
- . removable enamelled steel toilet bowl.
- . 1 stainless steel wire grid reducer.
- . cleanliness drawer in 18-10 stainless steel.
- . 1 baking sheet :
- . cast iron plate of: 420 x 600 mm with off-center plug.
- . crown type burner, power: 7 kW with pilot light and thermocouple safety.
- . "stop - ignition - full fire - idle" valve with backlash adjustment.
- . removable refractory elements in stainless steel formwork.
- . 18-10 stainless steel cleanliness drawer.

**Base :**

- . static gas oven GN2 / 1 : . dimensions W: 530 x D: 650 x H: 300 mm.
- . "H" type burner in enamelled steel, power 11 kW with pilot burner and thermocouple safety.
- . stop-start-stop valve and regulation thermostat 50 - 300 ° C.
- . 4 mm thick steel hearth / stainless steel muffle with high density insulation.
- . removable runners in enamelled steel, 3 levels of guides spaced 70 mm apart.



**Natural gas flow G20/20 :**

3,65








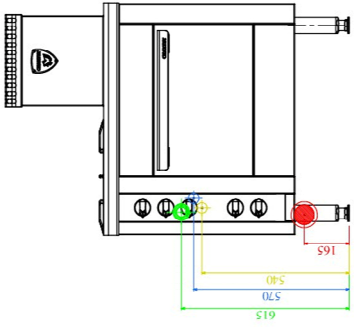
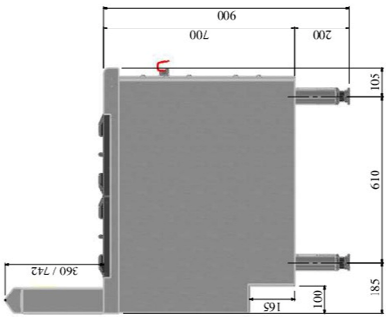
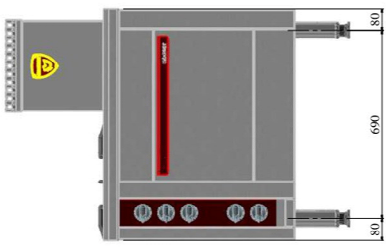
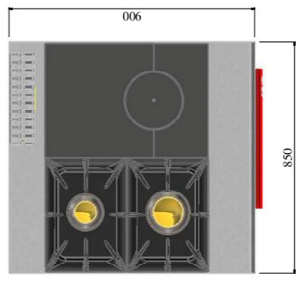
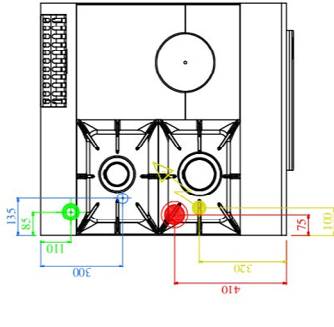
**Propane gas flow G31/37 :**

2,68

OPTIONS	CODE
Electric spark ignition 1-230V+E/0,002 Kw	V01014
"Double-crown" burner 8 kW In place of 1 standard burner	V02459
"IS-ECO" burner In place of 2 standard burners 1-230 V + E	V02890
S/S rear panel fitted in factory W : 840 x H: 645 mm	V01182
	0

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V01187



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Optionen Ausstattung Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Weichwasseranschluss Conexión agua suavizada ≤ 3bars-7°F Wasserzulauf (gef. filtertes wasser) ≤ 3bars-7°F (3FH) Conexión agua suavizada ≤ 3 bars-lb.-7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
					<p>Ø 15x21 (1/2") 1 ~230V + PE Ø 1.50mm<sup>2</sup> Ø 8x13 (1/4") Ø 20x27 (F3/4")</p>	<p>+ 2.50m de câble électrique.</p> <p><b>V01463 PRO900C3FN/PL</b></p>



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

