

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 320/380.

- Top :
 - . 4 "I.SYSTEM" crown-burners (patented by CHARVET) rated (front) 10kW and (rear) 6.5kW - under 2 cast iron pan support measuring 420x300mm, with pilot light and flame failure safety cut-out thermocouple; recessed gas tap control (OFF/ignition/full power/slow-down positions).
 - . 2 removable spillage tray in enamelled steel
 - . 2 stainless steel reductor for small pans.
 - . Drip tray in front, AISI 304 stainless steel.
- Base :
 - . Bridge unit
- Gas rating : 33kW

Natural gas flow G20/20 :	3,49 l/h
Propane gas flow G31/37 :	2,56 kg/h








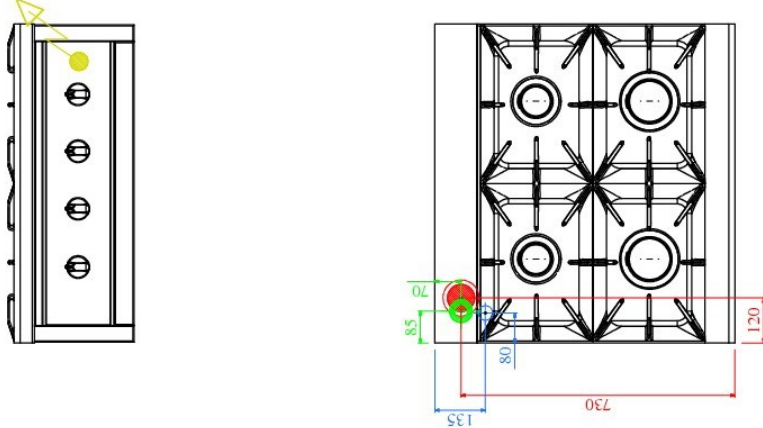
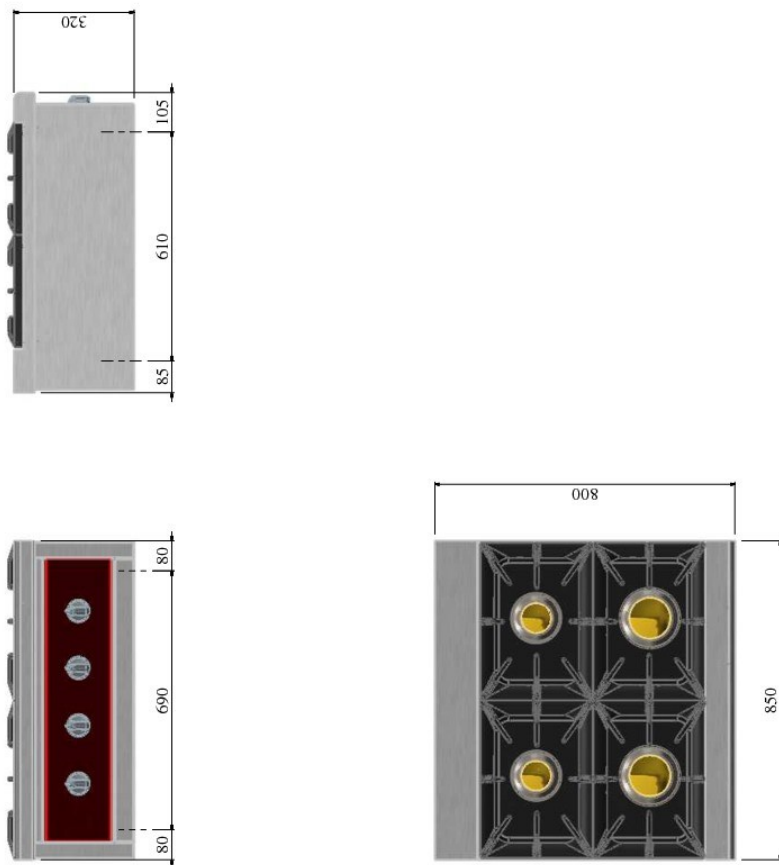





REFERENCE : R-G4FN

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01582	850 X 800 X 320/380	-	GAS : 33 kW	110 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
Removable water tank (Requires water, mains drainage connection and 1~230V+E supply)	V02409
Electric ignition for burners (Requires 1~230V+E supply)	V01014
Double 8kW crown burner in place of 1 standard burner	V02459
IS-ECO burner in place of 1 standard burner (Requires 1~230V+E supply)	V02890
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Options Aufanfrage Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F	 Ecoulement eaux usées sewage outflow wasserablauf de-sage
						
						
     Ø 15x21 (1/2") 1~230V + PE Ø1.50mm ² Ø 8x13 (1/4") Ø 20x27 (F3/4")						
V01582 PRO 800 R-G4FN						