

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



APPLIANCE DESCRIPTION

Dimensions (mm) : L 850 x P 800 x H 900.

- Top :
 - . 2 "I.SYSTEM" crown-burners (patented by CHARVET) rated (front) 10kW and (rear) 6.5kW - under 2 cast iron pan support measuring 420x300mm, with pilot light and flame failure safety cut-out thermocouple; recessed gas tap control (OFF/ignition/full power/slow-down positions).
 - . 1 removable spillage tray in enamelled steel
 - . 1 stainless steel reductor for small pans.
 - . Drip tray in front, AISI 304 stainless steel.
- . 1 cast iron solid top measuring 420x600mm in 2 parts, 1 off-centred bull's eye.
 - . Crown burner rated : 7kW.
 - . Removable refractory cement heat retention shielding underneath and inside a stainless steel casing.
 - . Control : pilot light and flame failure safety cut-out thermocouple; recessed gas tap (OFF/ignition/full power/slow-down positions).
 - . Drip tray in front, AISI 304 stainless steel.

- Base:
Bridge unit

- Gas rating : 23.5kW

Natural gas flow G20/20 :	2,49 l/h
Propane gas flow G31/37 :	1,83 kg/h








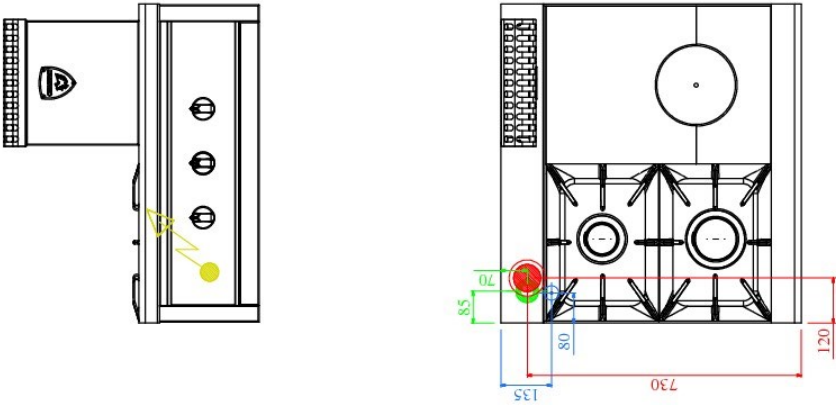
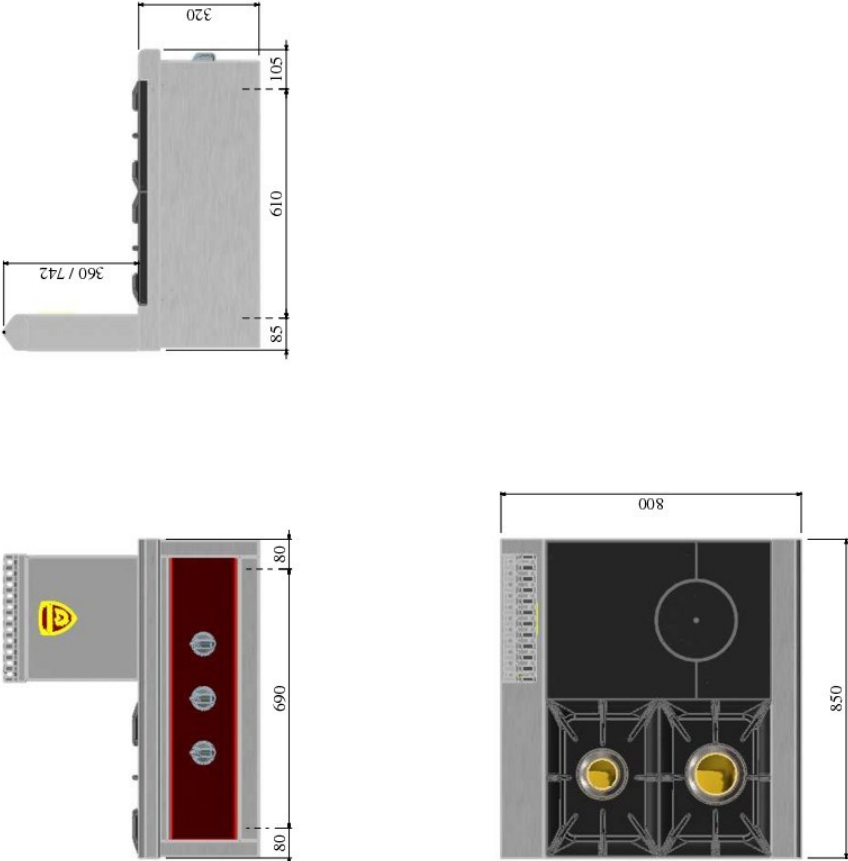





REFERENCE : R-G3FN/PL

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01590	850 X 800 X 320/380	-	GAS : 23.5 kW	115 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
Removable water tank (Requires water, mains drainage connection and 1~230V+E supply)	V02409
Electric ignition for burners (Requires 1~230V+E supply)	V01014
Double 8kW crown burner in place of 1 standard burner	V02459
IS-ECO burner in place of 1 standard burner (Requires 1~230V+E supply)	V02890
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sague</p>
						
						
     <p>Ø 15x21 (1/2") 1~230V + PE Ø1.50mm² Ø 8x13 (1/4") Ø 20x27 (F3/4")</p>						
<p>V01590 PRO800R-G3FN/PL</p>						