

1 LARGE SOLID TOP

OPEN BASE

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).



APPLIANCE DESCRIPTION

Dimensions (mm) :W : 850 x D : 800 x H : 900.

- Top :
 - . 1 cast iron solid top measuring 845x600mm with centred bull's eye.
 - . Crown burner rated 12kW
 - . Refractory cement heat retention shielding underneath and inside a stainless steel removable casing.
 - . Control : pilot light and flame failure safety cut-out thermocouple; recessed gas tap (OFF/ignition/full power/slow-down positions).
 - . Drip tray in front, AISI 304 stainless steel.

- Base :
 - . Open base.

- Gas rating : 12kW.

Natural gas flow G20/20 :	1,27 l/h
------------------------------	----------

Propane gas flow G31/37 :	0,93 kg/h
------------------------------	-----------








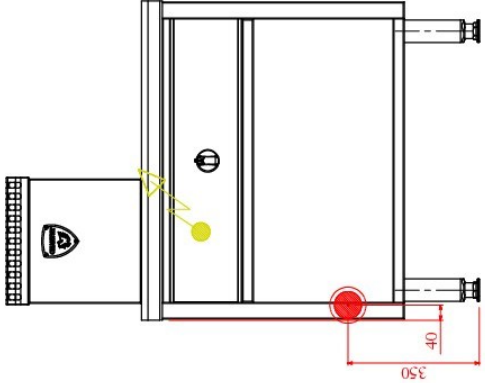
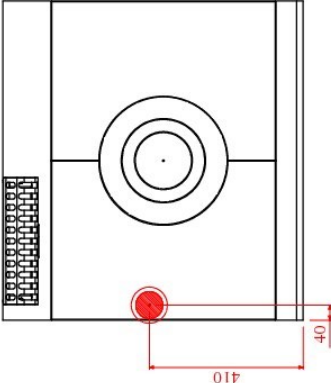
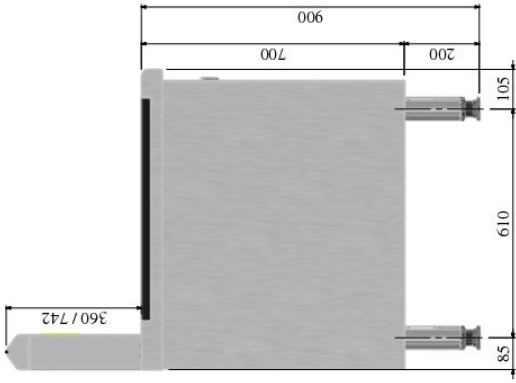
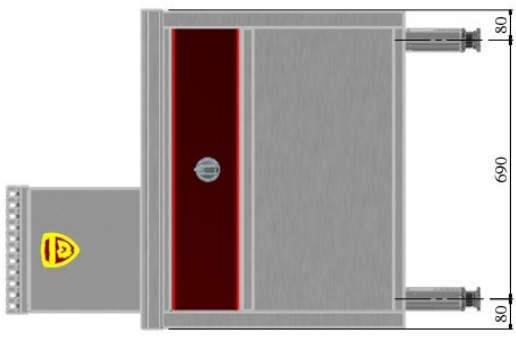
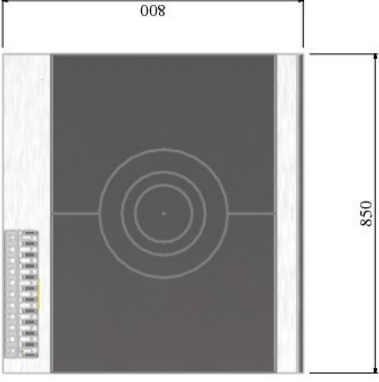





REFERENCE : B-G1PL

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01605	850 X 800 X 900	-	GAS : 12 kW	175 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
4 x GN2/1 Electric hot cupboard (2.25kW / 3~400V+E)	V00826
Hinged doors for open base	V01813
-	-
Electric ignition for burners (Requires 1~230V+E supply)	V01014
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf de-sague</p>
 						
						
  <div data-bbox="1219 1084 1445 1576" style="border: 1px solid black; padding: 5px;">      <p>Ø 15x21 (1/2") 1~230V + PE Ø 1.50mm²</p> </div>						
<p style="text-align: right;">V01605 PRO800 B-GIPL</p>						

