


### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

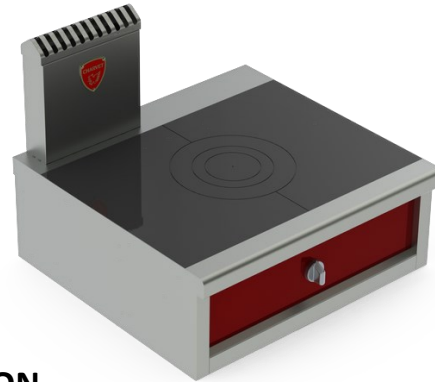

### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 320/380.

- Dessus :
  - . 1 cast iron solid top measuring 845x600mm with centred bull's eye.
  - . Crown burner rated 12kW
  - . Refractory cement heat retention shielding underneath and inside a stainless steel removable casing.
  - . Control : pilot light and flame failure safety cut-out thermocouple; recessed gas tap (OFF/ignition/full power/slow-down positions).
  - . Drip tray in front, AISI 304 stainless steel.

- Base :
  - . Bridge unit

- Gas rating : 12kW

Natural gas flow G20/20 :	1,27 l/h
------------------------------	----------

Propane gas flow G31/37 :	0,93 kg/h
------------------------------	-----------








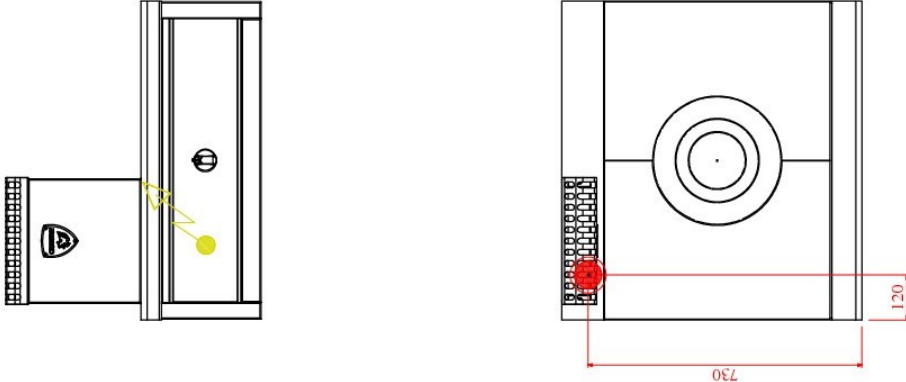
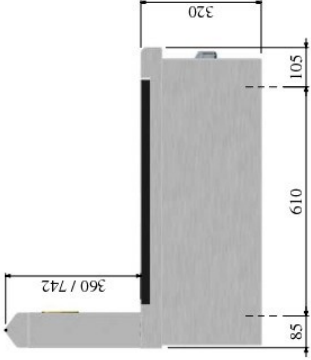
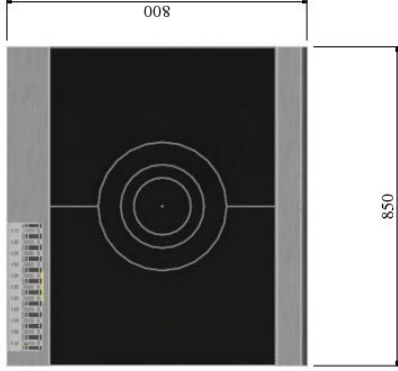
REFERENCE : R-G1PL

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V01606</b>	850 X 800 X 320/380	-	GAS : 12 kW	155 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
Electric ignition for burners (Requires 1~230V+E supply)	V01013
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf de-sague</p>
						
						
 <p><b>Ø 15x21 (1/2")</b> 1~230V + PE Ø1.50mm<sup>2</sup></p> <p><b>V01606 PRO800 R-GIPL</b></p>						