

### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 320/380.

- Top :
  - . 1 cast iron solid top measuring 420x600mm with off-centred bull's eye.
  - . 1 Crown burner rated 7 kW
  - . Refractory cement heat retention shielding underneath and inside a stainless steel removable casing.
  - . Control : pilot light and flame failure safety cut-out thermocouple; recessed gas tap (OFF/ignition/full power/slow-down positions).
  - . Drip tray in front, AISI 304 stainless steel.
- Base :
  - . Open base
- Gas rating : 7kW.

Natural gas flow G20/20 :	0,74 l/h
Propane gas flow G31/37 :	0,54 kg/h








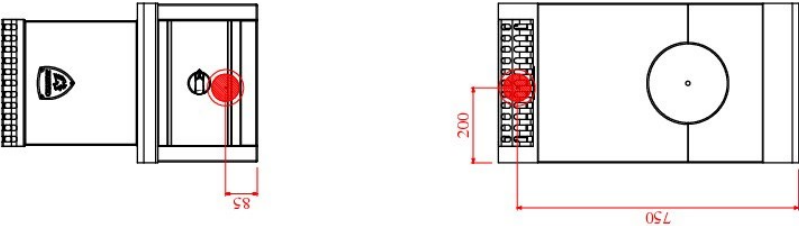
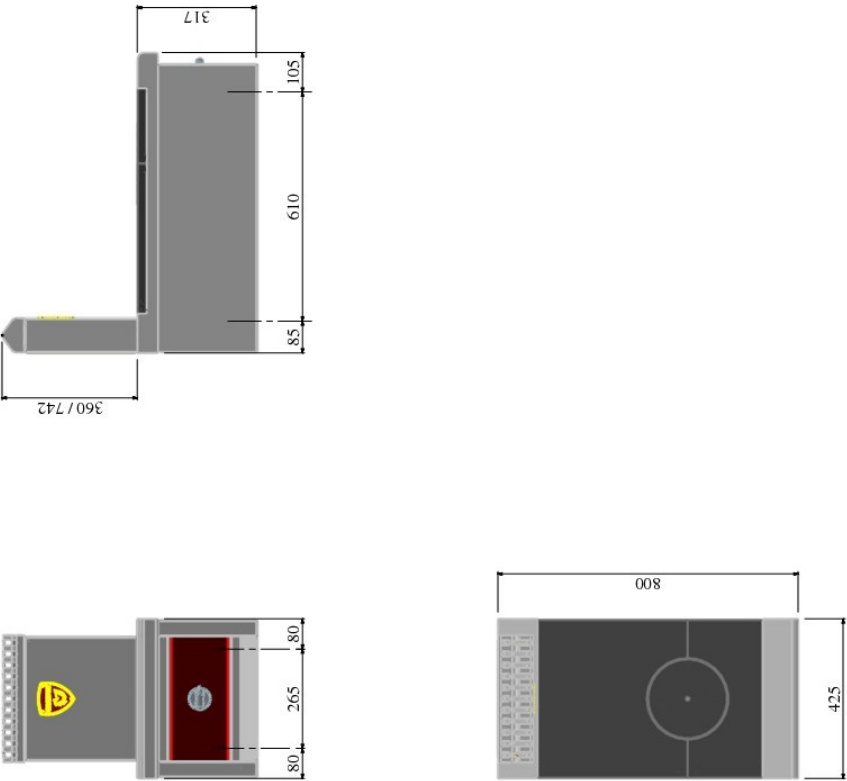

REFERENCE : 1/2 R-G1PL

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V01628</b>	425 X 800 X 320/380	-	GAS : 7 kW	75 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
-	-
-	-
Electric ignition for burners (Requires 1~230V+E supply)	V00567
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p>
						
						
 <p>Ø 15x21 (1/2") 1~230V + PE Ø 1.50mm<sup>2</sup></p> <p><b>v01628</b> PRO800-1/2R-G1PL</p>						