

## 60 L DIRECT HEATED BOILING PAN

### GENERAL DESCRIPTION

**Chassis:**  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

**- Top:**  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

**- Legs:**  
200 mm high AISI 304 stainless steel legs, diam.: 60 mm. Adjustable PVC feet (0 / + 30).

Natural gas flow G20/20 :	0,05
------------------------------	------

Propane gas flow G31/37 :	0,04
------------------------------	------

REFERENCE : 1/2 G1MF60CD



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H 900.

- Features :
- . 60 liter tank, 2 mm thick AISI 316 stainless steel bottom and 2 mm side AISI304 stainless steel sides (internal dimensions : W : 305 x D : 500 x H 400)
- . Cove vertical and horizontal edges
- . Inclined bottom,
- . Removable stainless steel strainer, front drain tap with foldable handle.
- . AISI 304 stainless steel lid with tubular insulated handle on stainless steel spring hinges.
- . Direct heated by enamelled steel gas "multi-ramps" burner
- . Control : pilot light and flame failure safety cut-out thermocouple; recessed gas tap (OFF/ignition/full power/slow-down positions).
- . Electric sparking ignition controlled by push button








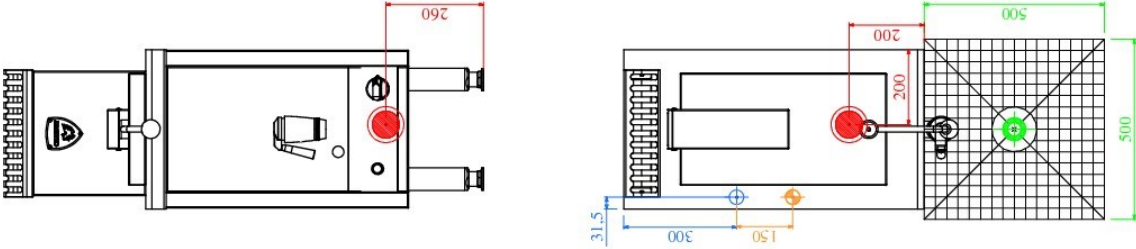
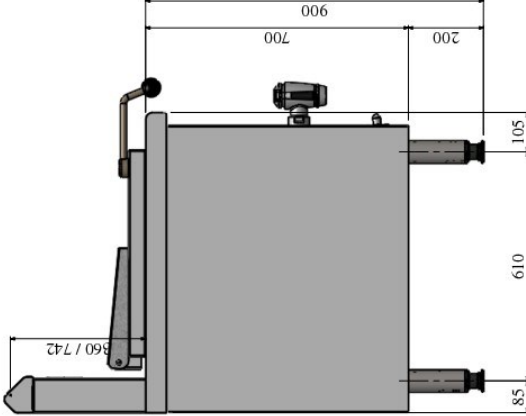
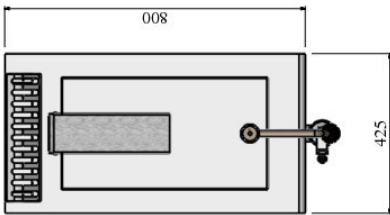















- Gas rating : 11.6 kW
- Electrical rating : 0.02kW / 1~230V+E.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V01637</b>	425 X 800 X 900	1~230V+E	GAS : 11.6 kW	85 kg

OPTIONS	CODE
AISI 316 L stainless steel tank	V01433
-	-
Thermostatic regulation ranging from 1 to 8	V01297
Overheat safety cut-out device	V01298
Counter balanced lid	V01177
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-

ACCESSORIES	CODE
Mixer HW/CW water tap 20x27 (360°)	Mixer HW/CW water tap 20x27
_V01651	V01651
Hole cut to suit client's tap	V01292



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf de-sague</p>										
																
																
 <table border="1" data-bbox="1220 1086 1444 1579"> <tr> <td></td> <td>Ø 15x21 (1/2")</td> </tr> <tr> <td></td> <td>1~230V + PE Ø 1.50mm<sup>2</sup></td> </tr> <tr> <td></td> <td>Ø 15x21 (1/2")</td> </tr> <tr> <td></td> <td>Ø 15x21 (1/2")</td> </tr> <tr> <td></td> <td>Ø 100 mm</td> </tr> </table> <p><b>V01637</b> PRO800-1/2GIMF60CD</p>								Ø 15x21 (1/2")		1~230V + PE Ø 1.50mm <sup>2</sup>		Ø 15x21 (1/2")		Ø 15x21 (1/2")		Ø 100 mm
	Ø 15x21 (1/2")															
	1~230V + PE Ø 1.50mm <sup>2</sup>															
	Ø 15x21 (1/2")															
	Ø 15x21 (1/2")															
	Ø 100 mm															