

150 | DIRECT HEATED BOILING PAN

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- **Top:**
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow G20/20 :	1,06
------------------------------	------

Propane gas flow G31/37 :	0,78
------------------------------	------

REFERENCE : G1MF150CD



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H 900.

- Features :
- . 150 liter tank, 2 mm thick AISI 316 stainless steel bottom and 2 mm side AISI304 stainless steel sides (internal dimensions : W : 730 x D : 500 x H 400)
- . coved vertical and horizontal edges
- . inclined bottom,
- . removable stainless steel strainer, front drain tap with foldable handle.
- . AISI 304 stainless steel lid with tubular insulated handle on stainless steel spring hinges.
- . Direct heated by enamelled steel gas "multi-ramps" burner
- . Control : pilot light and flame failure safety cut-out thermocouple; recessed gas tap (OFF/ignition/full power/slow-down positions).
- . Electric ignition controlled by push button

- Gas rating : 25.6 kW








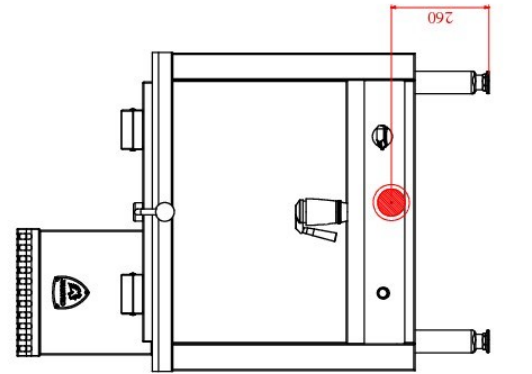
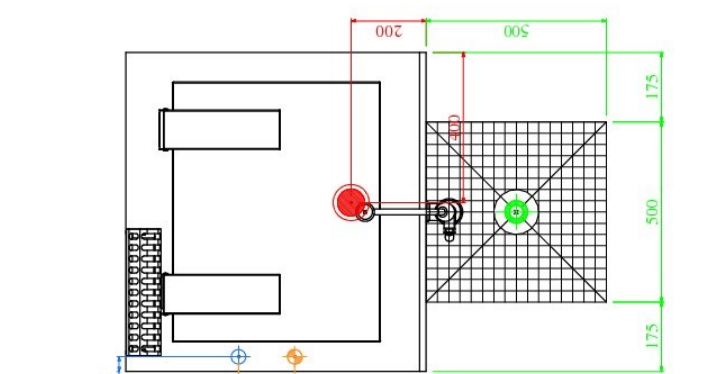
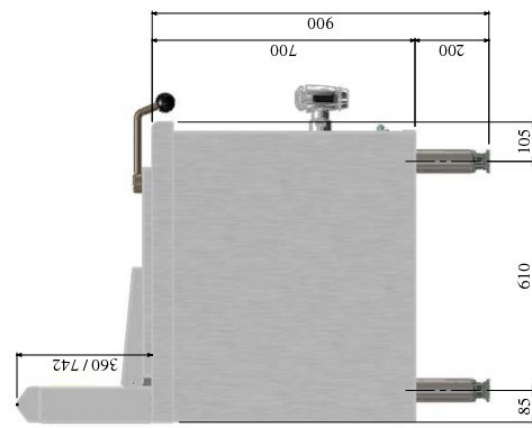
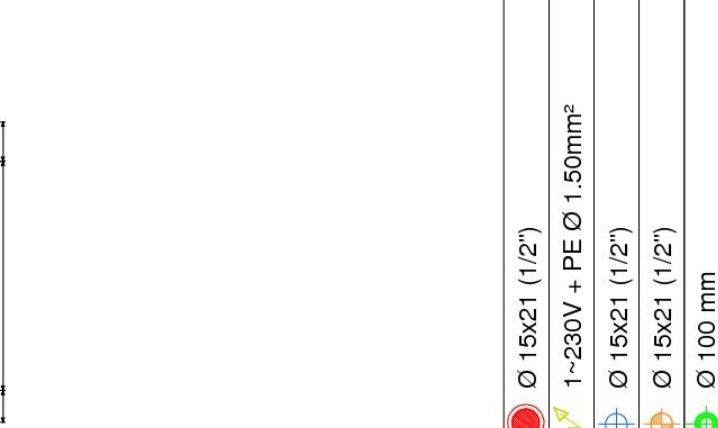
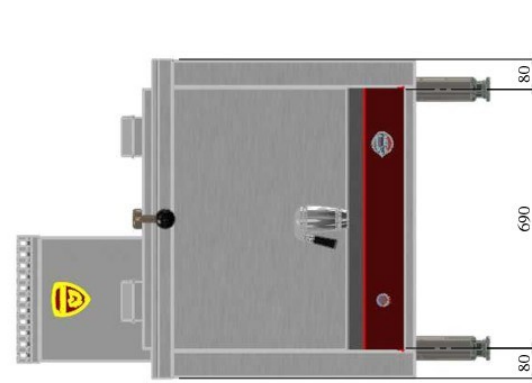





- Electrical rating : 0.02kW / 1~230V+E.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01639	850 X 800 X 900	1~230V+E	GAS : 25.6 kW	135 kg

OPTIONS	CODE
AISI 316 L stainless steel tank	V01433
Sequential regulation	V00568
Thermostatic regulation ranging from 1 to 8	V01297
Overheat safety cut-out device	V01298
Counter balanced lid	V00569
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-
-	-

ACCESSORIES	CODE
Mixer HW/CW water tap 20x27 (360°)	V00561
_V01651	V01651
Hole cut to suit client's tap	V01292



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h....7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h....7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sague</p>
						
						
		<p>  Ø 15x21 (1/2")  1~230V + PE Ø 1.50mm²  Ø 15x21 (1/2")  Ø 15x21 (1/2")  Ø 100 mm </p> <p>V01639 PRO800G IMF150CD</p>				

