

## BRATT PAN 50 dm<sup>2</sup> / 100 l

### GENERAL DESCRIPTION

**Chassis:**  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.


- **Top:**  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**  
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow G20/20 :	3,39
------------------------------	------

Propane gas flow G31/37 :	2,49
------------------------------	------

REFERENCE : G1SBM50i

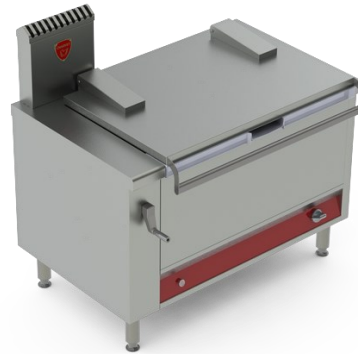

### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 1275 x D : 800 x H : 900.








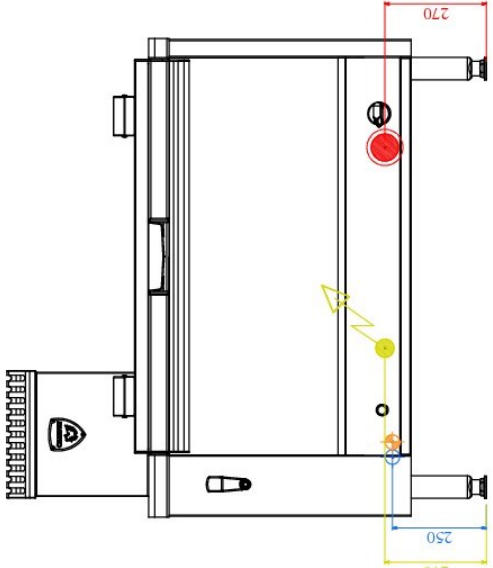
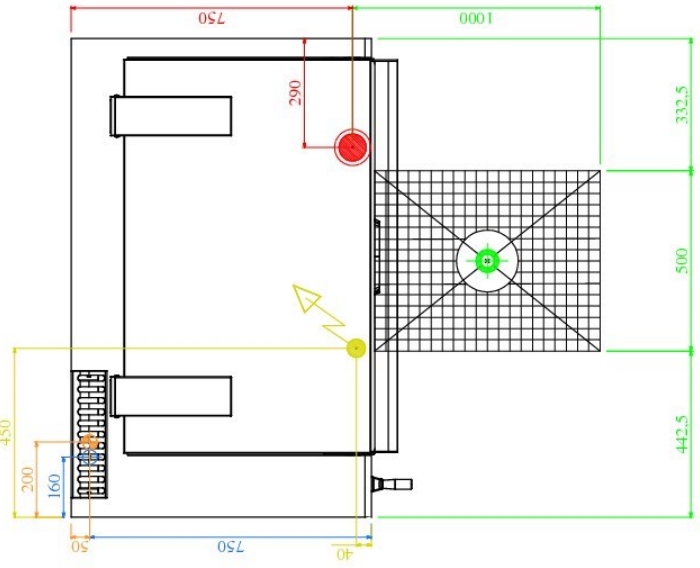
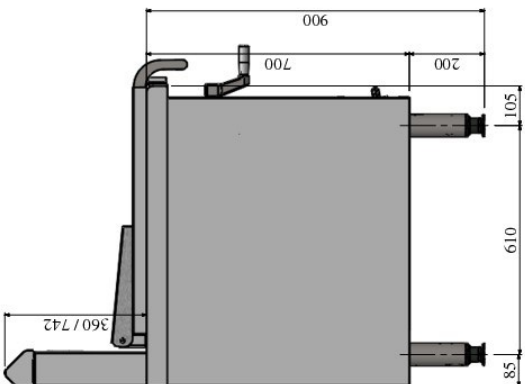
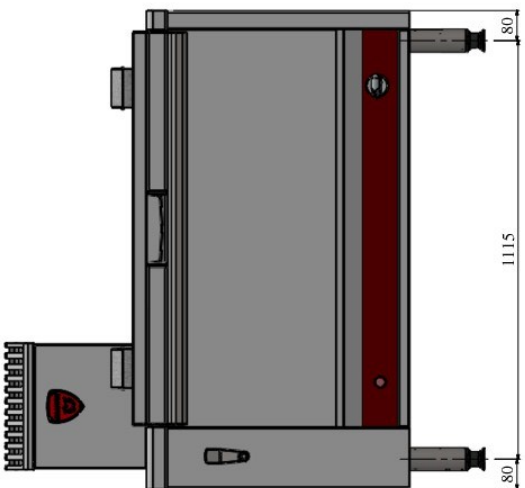
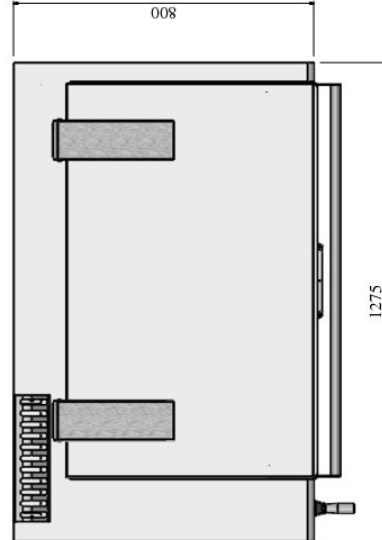
- Features :
  - . 50 dm<sup>2</sup> (100l) Stainless steel tank measuring W : 1015 x D : 490 x H : 250 (mm internal) with a 10 mm thick base and built-in front pouring spout.
  - . Manual tilting with uncoupling gear system controlled by handwheel in front
  - . Stainless steel lid with tubular insulated handle, stainless steel spring hinges.
- . Enamelled steel 'Multi-ramps' burner with pilot light and flame failure safety cut-out thermocouple; recessed gas tap control (OFF/ignition/full power/slow-down positions).
- . Electric sparking ignition.
- Gas rating : 26.7 kW
- Electrical rating : 0.02 kW / 1~230V+E.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V01644</b>	1275 X 800 X 900	1~230V+E	GAS : 26.7 kW	225 kg

OPTIONS	CODE
10 mm thick Bimetal bottom	V02043
Simmertat control with pan tilt safety cut-out	V01164
Pan tilt safety cut-out	V01060
-	-
Counter balanced lid	V00569
Removable stainless steel strainer	V02491
Stainless steel rear panel fitted in factory	V01183
Stainless steel plinth to clamp on legs	V01188
-	-
-	-

ACCESSORIES	CODE
Mixer HW/CW water tap 20x27 (360°)	V00561
_V01651	V01651
Hole cut to suit client's tap	V01292



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p>
					<p>Ø 15x21 (1/2") 1~230V + PE Ø 2.00mm<sup>2</sup> Ø 15x21 (1/2") Ø 15x21 (1/2") Ø 100 mm</p>	<p><b>V01644</b> PRO800G1SBM50I</p>

