


BRATT PAN 50 dm² / 100 l

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mm. Adjustable PVC feet (0 / + 30).

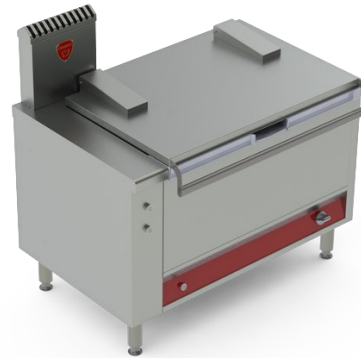

APPLIANCE DESCRIPTION

Dimensions (mm) : W : 1275 x D : 800 x H : 900.

- Features :
- . 50 dm² (100l) Stainless steel tank measuring W : 1015 x D : 490 x H : 250 (mm internal) with a 10 mm thick base and built-in front pouring spout.
- . Electric tilting by electromechanical linear actuator
- . Stainless steel lid with tubular insulated handle, stainless steel spring hinges.
- . Enamelled steel 'Multi-ramps' burner with pilot light and flame failure safety cut-out thermocouple; recessed gas tap control (OFF/ignition/full power/slow-down positions).
- . Electric sparking ignition.

- Gas rating : 26.7 kW
- Electrical rating : 0.2 kW / 1~400V+N+E.

Natural gas flow G20/20 :	1,06
------------------------------	------

Propane gas flow G31/37 :	0,78
------------------------------	------








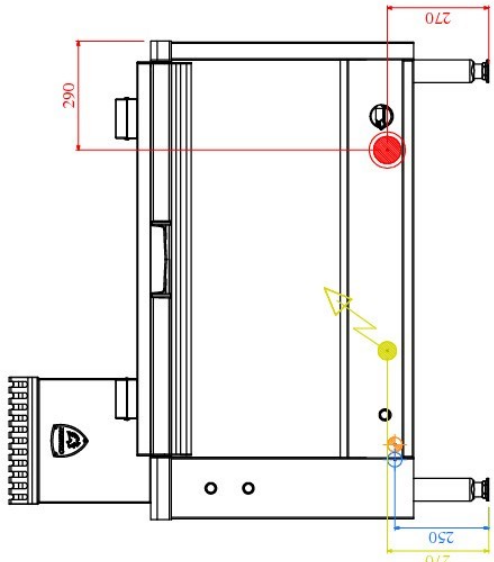
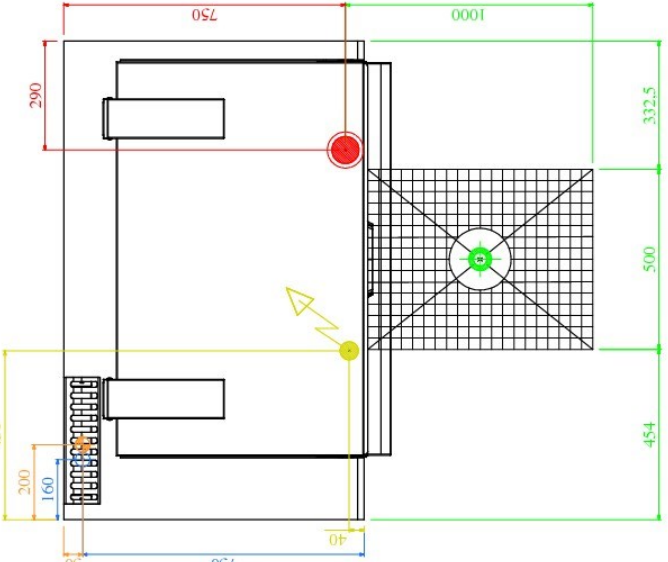
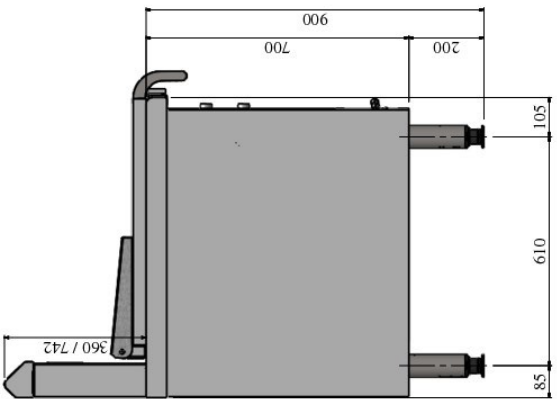
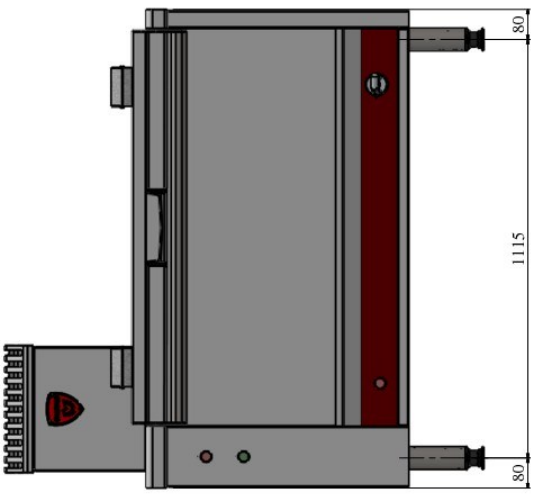
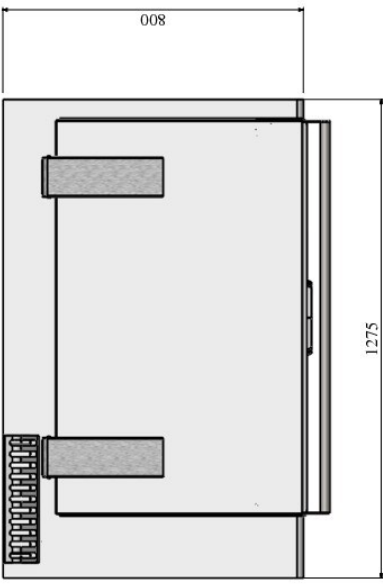
REFERENCE : G1SBE50i

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01645	1275 X 800 X 900	1~230V+E	GAS : 26.7 kW	225 kg

OPTIONS	CODE
10 mm thick Bimetal bottom	V02043
Simmertat control with pan tilt safety cut-out	V01164
Pan tilt safety cut-out (1~230V+E)	V01060
-	-
Counter balanced lid	V00569
Removable stainless steel strainer	V02491
Stainless steel rear panel fitted in factory	V01183
Stainless steel plinth to clamp on legs	V01188
-	-
-	-

ACCESSORIES	CODE
Mixer HW/CW water tap 20x27 (360°)	V00561
_V01651	V01651
Hole cut to suit client's tap	V01292



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
 		 <p>Ø 15x21 (1/2')</p> <p>1~230V + PE Ø 2.00mm²</p> <p>Ø 15x21 (1/2')</p> <p>Ø 15x21 (1/2')</p> <p>Ø 100 mm</p> <p>V01645 PRO800G1SBES01</p>				

