

DEEP FAT FRYER 28 L / 60 kg /h

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow G20/20 :	2,86 l/h
---------------------------	----------

Propane gas flow G31/37 :	2,1 kg/h
---------------------------	----------

REFERENCE : 1/2 G1FR28HR



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :
 - . AISI 304 stainless steel 28 l capacity tank, 2-2.5 mm thick with a 20 mm high edge to prevent debris from falling in the cooking oil and cold zone
 - . Submerged tube burners and secondary heat exchanger heated by torch burners rated 27 kW.
 - . Basket support and filtration grid placed on the heating tubes
 - . Oil level warning mark and oil expansion zone.
 - . Drain tap to front
- Control and safety :
 - . Double solenoid gas valve controlled by an electronic thermostat and safety thermostat.
 - . Electric sparking ignition.

- Accessory : 1 nickel coated fryer basket

- Base :
. None

- Gas rating 27 kW
- Electrical rating : 0.02kW / 1~230V+E.








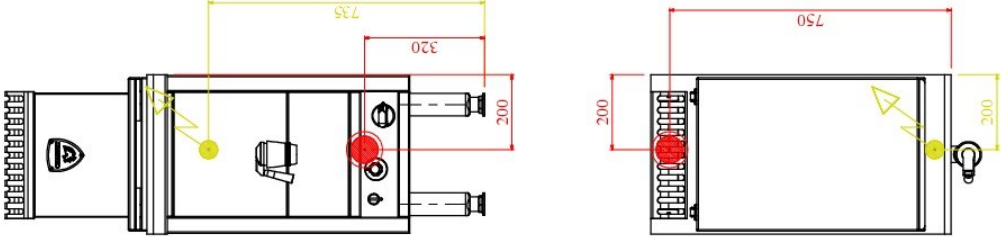
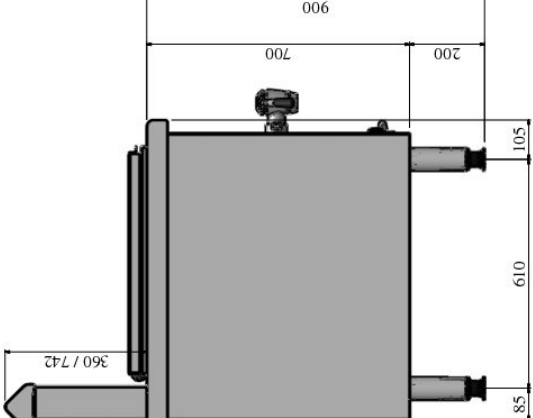
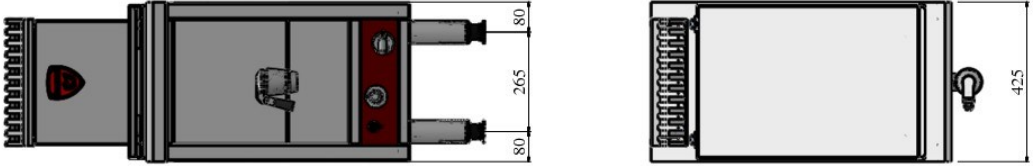





- Output : 60 kg/h blanched chips.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01647	425 X 800 X 900	1~230V+E	GAS : 27 kW	105 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
Automatic lift for 1 large basket	V01175
Automatic lift for 2 1/2 baskets	V01176
2x1/2 fryer basket to replace 1 large basket	V02214
Front electric socket (1~230V+E)	V02248
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-

ACCESSORIES	CODE
Fryer basket	00078A
1/2 fryer baskets	00079A
Stainless steel fish plate	F08679



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h....7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h....7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf de-sage</p>
						
						
 <p>  \varnothing 15x21 (1/2")  1~230V + PE \varnothing 1.50mm²    </p> <p>V01647 PRO800-1/2G1FR28HR</p>						