

4 BOILING PLATES 300x300

GN 2/1 ELECTRIC OVEN

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- **Top:**
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : E300



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- **Top :**
- . 4 300x300mm Cast iron electric boiling plates heated by armoured element rated 3kW each
- . Control : 3 + 'OFF' position switch and limit stat
- . Indicator light.
- . Drip tray in front, AISI 304 stainless

- **Base:**
- . Static electric oven GN2/1 - W 530 x D 650 x H 300mm.
- . 3-400V+E heating elements for mild-steel base and top ; rated 5kW; 8-position control knob: "vault/0/mild-steel base/0/low V+mild-steel base/0/high V+mild-steel base/0" - 50-300°C thermostat ; indicator lights.
- . AISI 304 stainless steel cavity, 4-mm thick mild steel base, stainless steel double skinned insulated sides, removable 3-position enamelled steel shelf runner (space between: 70mm), 1 x GN2/1 nickel coated oven shelf with anti-tilt supports + 1xGN2/1 pastry shelf.
- . AISI 304 stainless steel door and inner door with insulation, enamelled steel handle with aluminium supports.








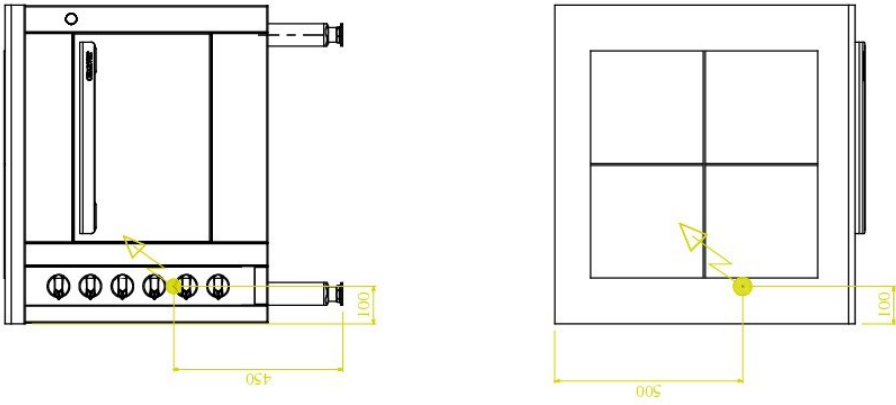
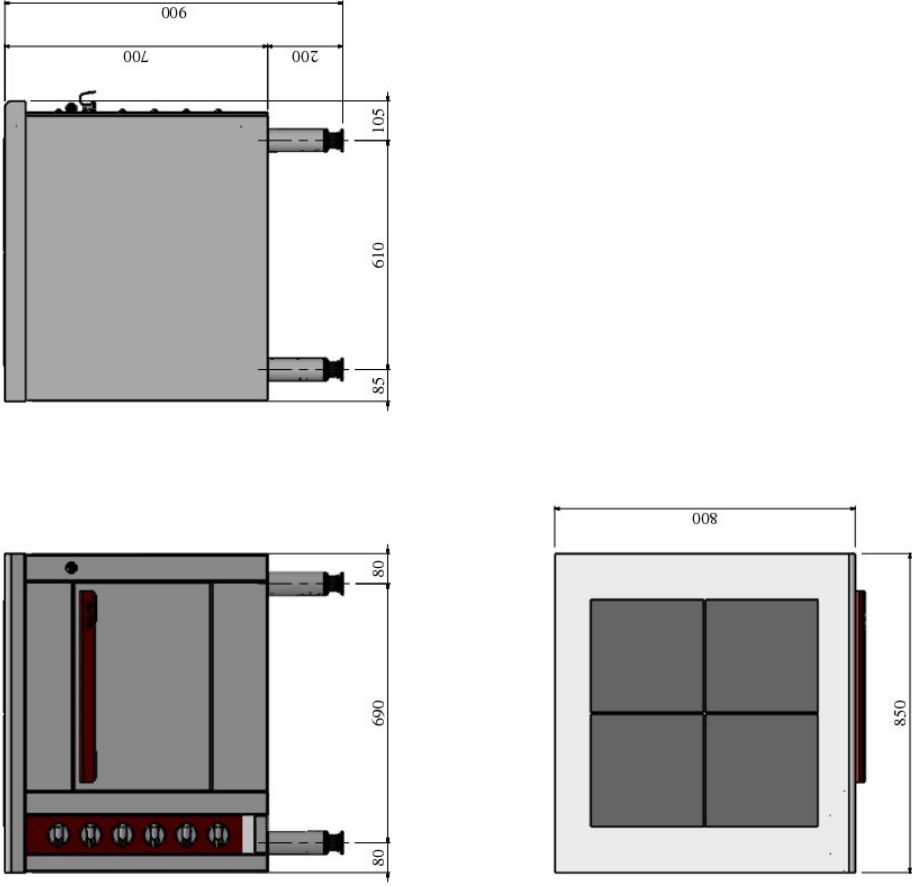





- Electrical rating : 17kW / 3~400V+E

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01653	850 X 800 X 900	3~400V+E	ELEC : 17 kW	180 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
Equipment for a 24 V remote control	V00878
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sague</p>
						
						
    						
<p>3~400V + PE P: 17 kW</p>						
<p>V01653 PRO800E300</p>						

