


GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

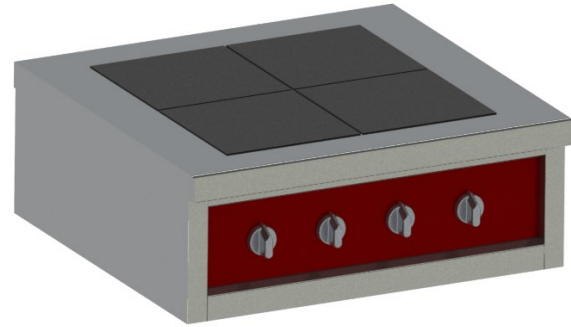

APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 320/380.

- Top :
 - . 4 300x300mm Cast iron electric boiling plates heated by armoured element rated 3kW each
 - . Control : 3 + 'OFF' position switch and limit stat
 - . Indicator light.
 - . Drip tray in front, AISI 304 stainless
- Base :
 - . Bridge unit
- Electrical rating : 12kW / 3~400V+E

Natural gas flow G20/20 :	-
Propane gas flow G31/37 :	-








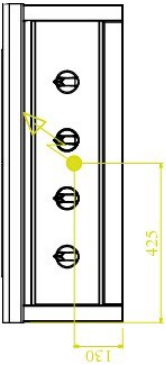
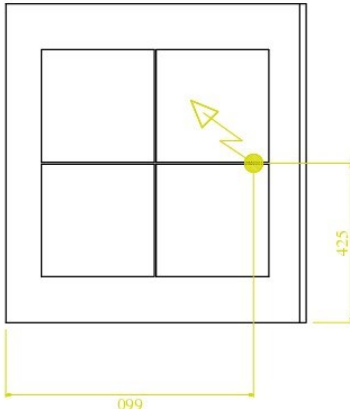
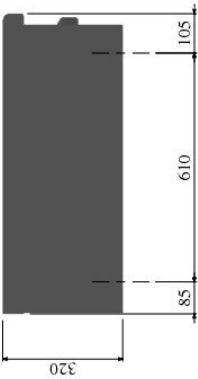
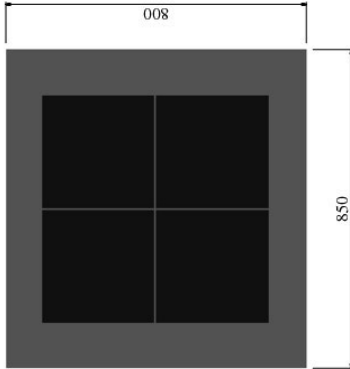




REFERENCE : R-E300

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01655	850 X 800 X 320/380	3~400V+E	ELEC : 12 kW	85 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
Equipment for a 24 V remote control	V00878
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gasV</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h....7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h....7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sague</p>	
							
							
<p>3~400V + PE P: 12 kW</p>							
						<p>V01655 PRO800R-E300</p>	

