

### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:  
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-

REFERENCE : 1/2 E1ETUV6-1/1



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :
    - . Neutral work top
  - Base :
    - . Hot cupboard.
    - . 6 level removable shelf runners,
    - . Heating by tubular armoured element rating 1.5kW fitted under a base plate,
    - . 30-110°C thermostatic regulation with 'OFF' position.
    - . Indicator light
    - . AISI304 stainless steel hinged door with inner door
  - Accessory :
    - . 1 GN1/1 nikel coated wire shelf (325x530mm)
- Electrical rating : 1.5 kW / 3~400V+E.








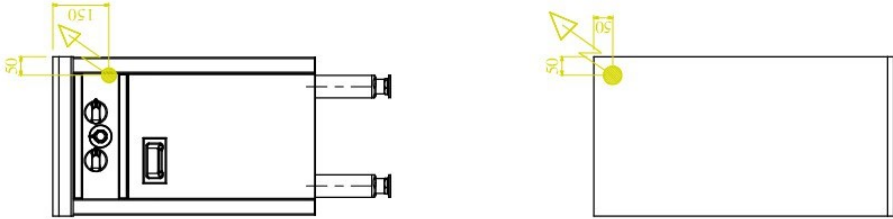
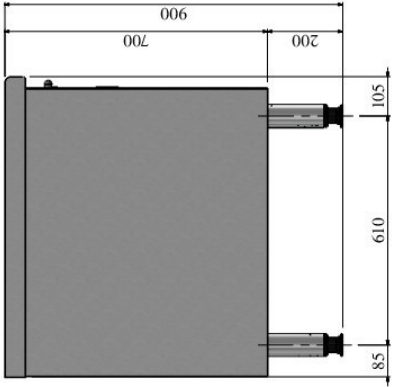
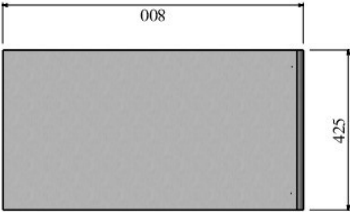





CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V01709</b>	425 X 800 X 900	1~230V+E	ELEC : 1.5 kW	40 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
Equipment for a 24V remote control	V00878
-	-
-	-
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
 <p data-bbox="1222 1525 1445 1576">      </p> <p data-bbox="1270 1218 1302 1496">1 ~230V + PE P: 1,5 kW</p> <p data-bbox="1414 1753 1445 2089"><b>v01709</b> PRO800-1/2E1ETUV6-1/1</p>						