

GN2/1 HOT CUPBOARD 6 LEVELS

HOT CUPBOARD

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- **Top:**
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : B-E1 ETUV6-2/1



APPLIANCE DESCRIPTION








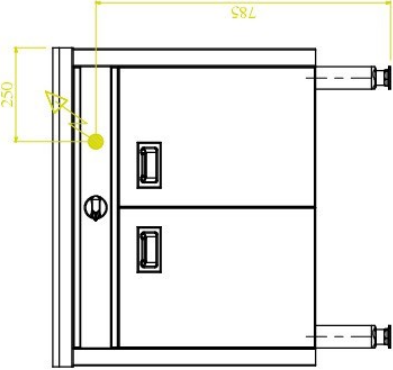
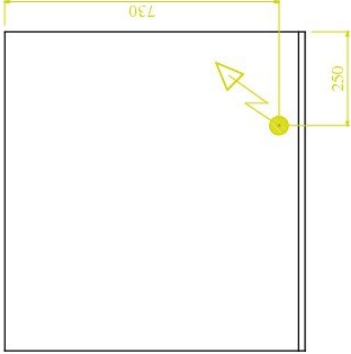
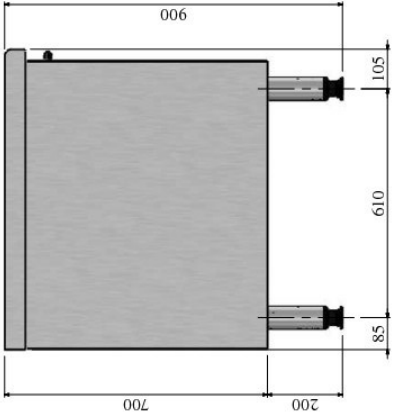
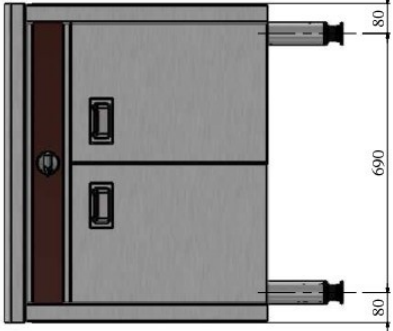
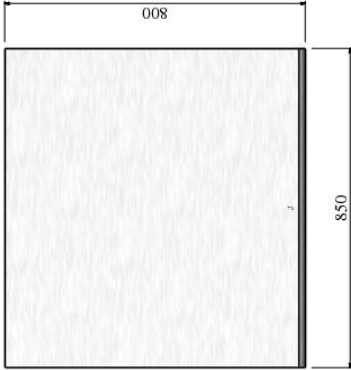





Dimensions (mm) : W : 850 x D : 800 x H : 900.

- **Top :**
 - . Neutral work top 2 mm thick AISI304 stainless steel
 - **Base :**
 - . Hot cupboard GN2/1.
 - . 6 level removable shelf runners,
 - . Heating by tubular armoured element rating 2.25kW fitted under a base plate,
 - . 30-110°C thermostatic regulation with 'OFF' position.
 - . Indicator light
 - . AISI304 stainless steel hinged door with inner door
 - **Accessory :**
 - . 1 GN2/1 nikel coated wire shelf (650x530mm)
- Electrical rating : 2.25 kW / 3~400V+E.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01710	850 X 800 X 900	3~400V+E	ELEC : 2.25 kW	75 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
Equipment for a 24V remote control	V00878
-	-
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-
-	-
-	-
-	-
-	-
ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p>
 						
 						
 <div data-bbox="1220 1079 1447 1576" style="border: 1px solid black; padding: 5px;">      <p>3~400V + PE P: 2,25 kW</p> </div> <p data-bbox="1412 1787 1444 2098">v01710 PRO800E ETUV6-2/I</p>						