

## NEUTRAL WORKTOP


## GN2/1 STORAGE CUPBOARD +

### GENERAL DESCRIPTION

**Chassis:**  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- **Top:**  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**  
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

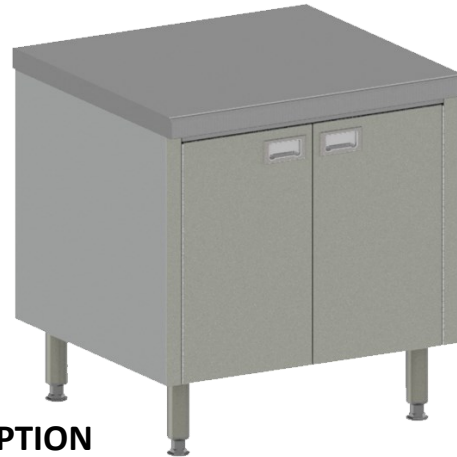

### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- **Top :**  
Neutral worktop

- **Base :**  
Cupboard with 2-piece floor in stainless steel  
Hinged doors and inner doors in stainless steel with magnetic hasps and handle.  
2x9 level 60mm spaced out removable stainless steel shelf runners to receive excluded GN1/1 (325x530mm) shelves.

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-








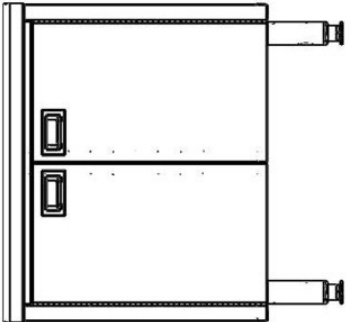
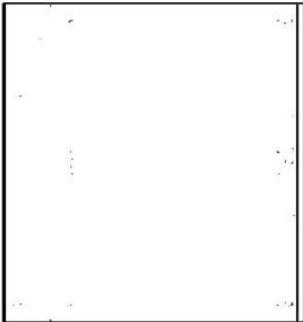
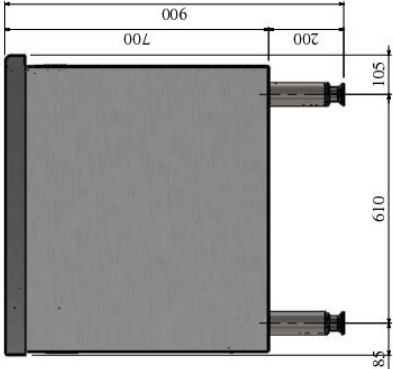
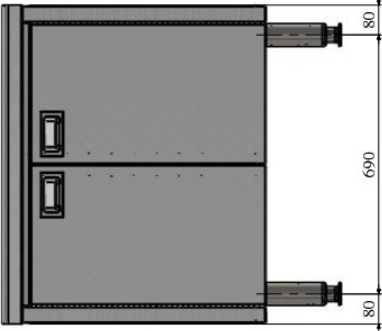
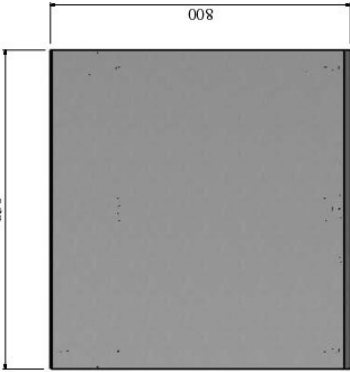





REFERENCE : B-RANG/P

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V01714</b>	850 X 800 X 900	-	-	65 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
Panel + enamelled front panel (5 level remaining in the cabinet)	S00027
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
 						
  						
     <p><b>V01714 PRO 800 PLACARD</b></p>						