


GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

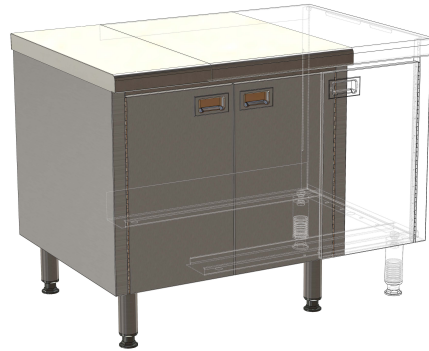

APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 to 850 x D : 800 x H : 900.

- Top :
. Neutral worktop

- Base :
. Cupboard with 1 or 2-piece floor in stainless steel
. 1 or 2 Hinged doors and inner doors in stainless steel with magnetic hasps and handle.

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :








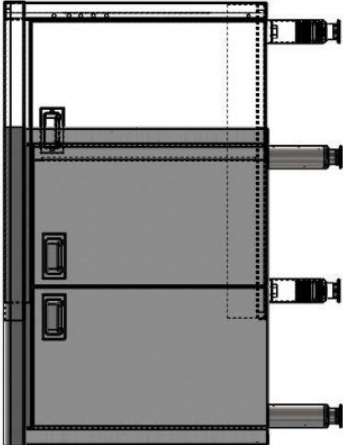
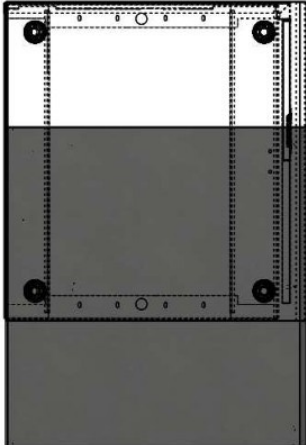
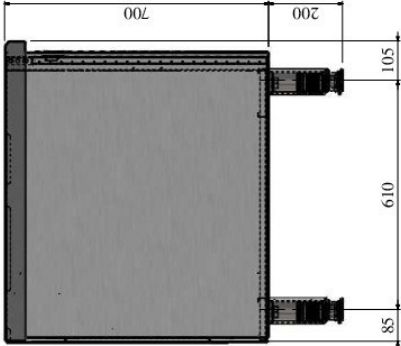
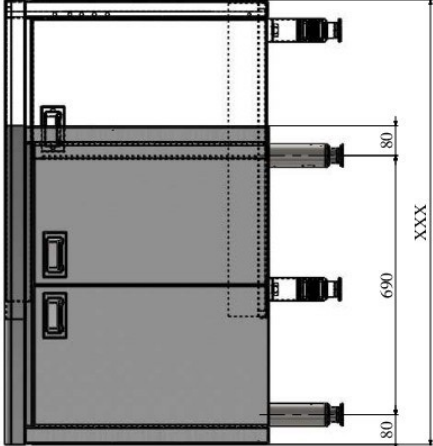
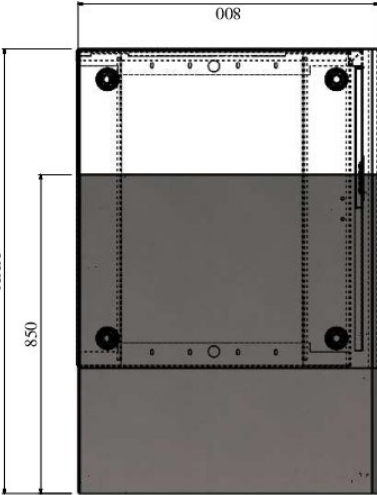

-

REFERENCE : PLAC-SM/P

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01716	425-850 X 800 X 900	-	-	-

OPTIONS	CODE
150 mm wide plating shelf	V00806
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
		 	  <p>V01716 PRO 800 PLACARD SM</p>			