

## NEUTRAL WORKTOP


## CUPBOARD WITH DOOR

### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:  
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 300 to 415 x D : 800 x H : 900.

- Top :  
. Neutral worktop

- Base :  
. Cupboard with 1 or 2-piece floor in stainless steel  
. 1 or 2 Hinged doors and inner doors in stainless steel with magnetic hasps and handle.

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-










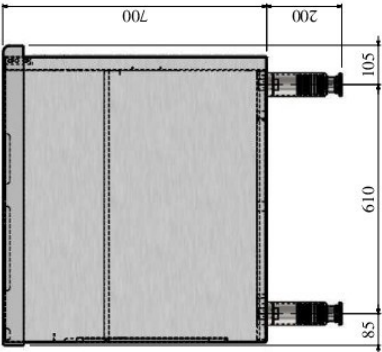
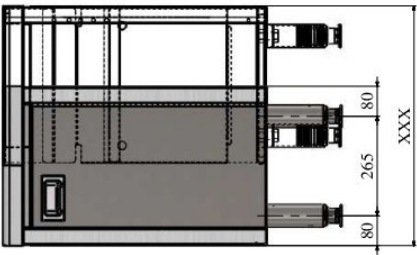
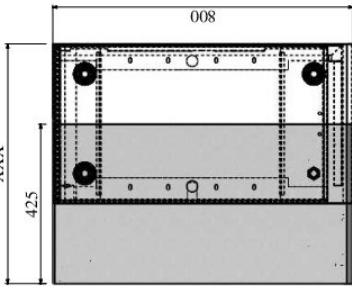





REFERENCE : 1/2PLAC-SM/P

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V01723</b>	300-415 x 800 x 900	-	-	-

OPTIONS	CODE
150 mm wide plating shelf	V00805
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
 						
  						
    						

V01723 1/2 PRO 800 PLAC-SM/P

