



# HALF MODULE UNIT - HOT CUPBOARD 6 GN1/1

## HOT CUPBOARD 6 GN1/1

# Pro 900

### Summary

<b>Energy :</b> ELEC	<b>Code :</b> V01745	<b>Designation :</b> E1ETUV6-1/1
-------------------------	-------------------------	-------------------------------------

<b>Dimensions (W x D x H) :</b> 425 x 900 x 900 mm <b>Power : 1,5 kW (elec)</b> <b>Voltage/Electric p. : 1~200V+E / 1,5</b> <b>Weight :</b>
---

## DEVICE DESCRIPTION

### General description

- Chassis :**  
One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.
- Top :**  
Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.
- Base :**  
Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

<b>Natural gas flow G20/20 :</b>
<b>Propane gas flow G31/37 :</b>




- Above :**
  - . Neutral top in 18-10 stainless steel
- Below :**
  - . Electric oven with 6 levels GN1 / 1:
  - . 18-10 stainless steel cage
  - . 6-level 18-10 stainless steel flanges (e = 60 mm)
  - . Insulation thickness: 10 to 25 mm (top, back and sides)
  - . 18-10 stainless steel door and storm door with stainless steel handle and magnetic latch
- Heating :**
  - . Heaters 1 ~ 230V + T, power 1.50 kW under the floor
  - . Thermostat 30 - 110 ° C with off position
- Endowment:**
  - . 1 wire grid GN1 / 1 (325x530 mm) in nickel-plated steel

OPTIONS	CODE
Hinged doors for open base	Included
Equipment for a 24V remote control contactor(s) not supplied	V00878
S/S rear panel fitted in factory W : 415 x H : 645 mm	V01181

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V01186



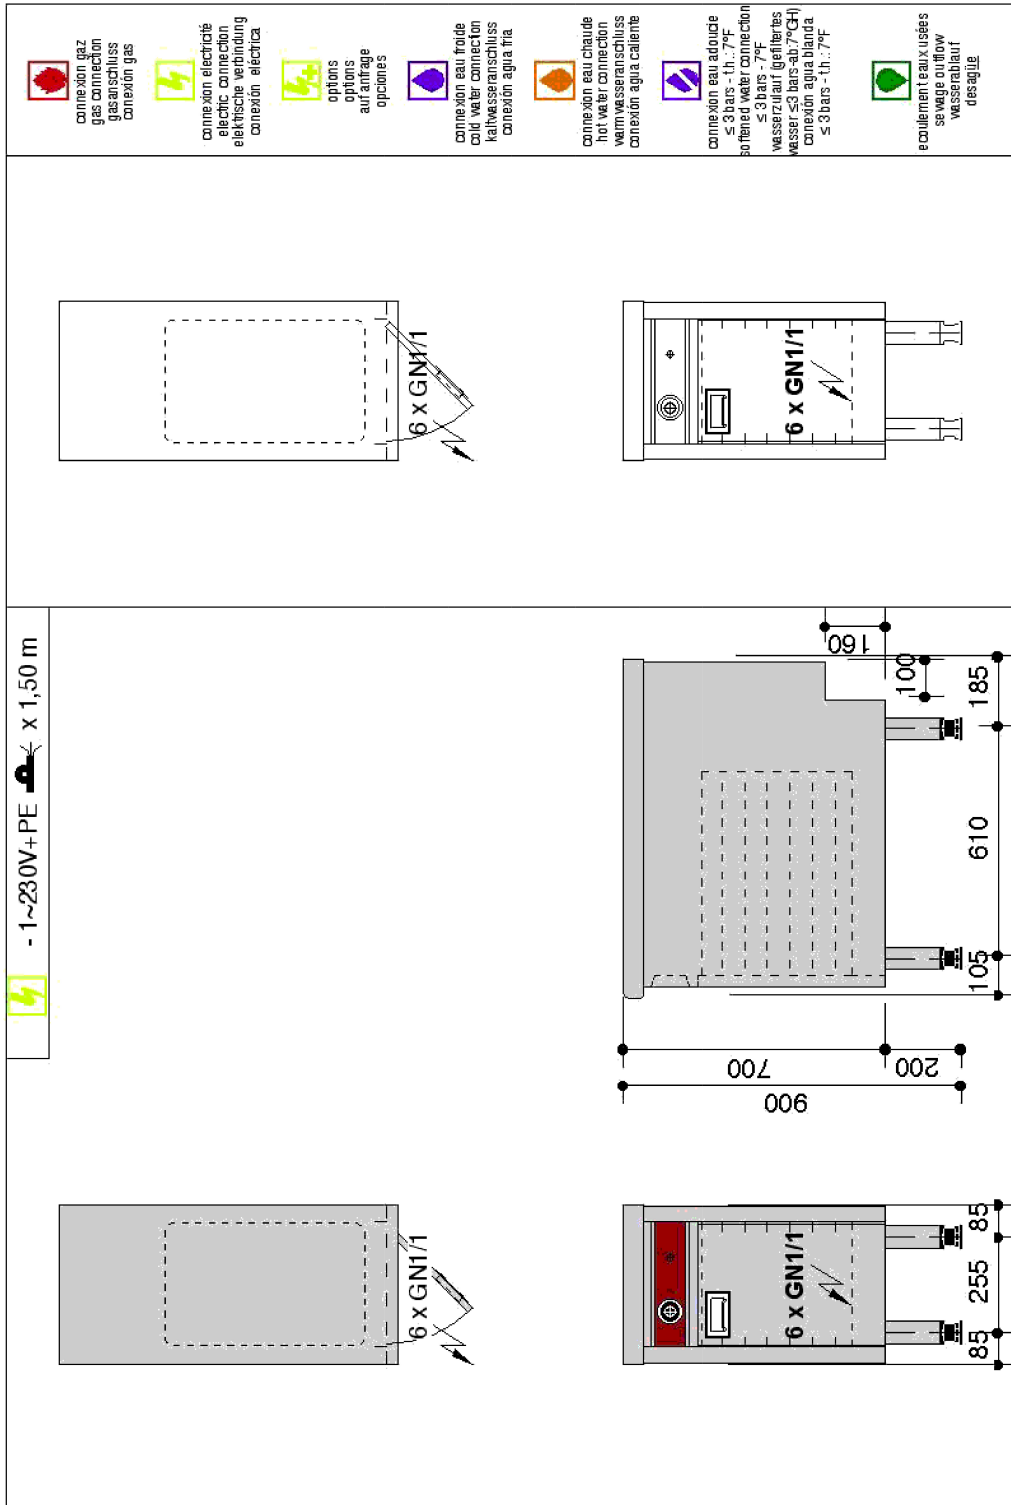

LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

