

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 320/380

- Top :
- . 1 Bain-marie tank for GN1/1 container with a 20 mm high edge to prevent debris from falling in the tank.
 - . Perforated double bottom in AISI 316 stainless steel
 - . Drain tap to front
 - . Heating element rated 1 kW fitted underneath the tank in a tight coffer
 - . Thermostatic regulation 30-110°C with "STOP" position and "ON" light - indicator
 - . Removable lid in AISI 304 stainless steel with handle
 - . Containers and supports excluded

- Base :
- . Bridge unit

- Electrical rating : 1 kW / 1~230V+E.

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-








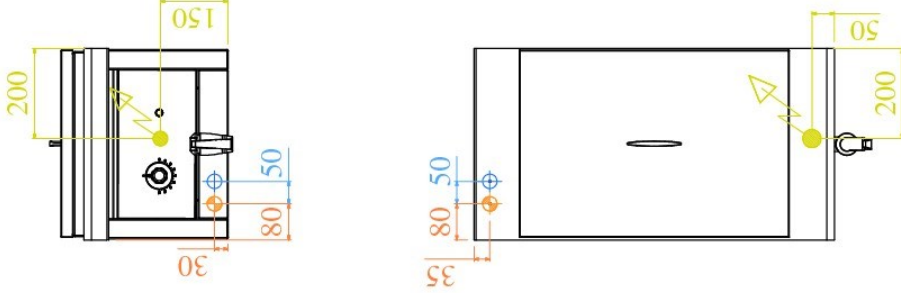
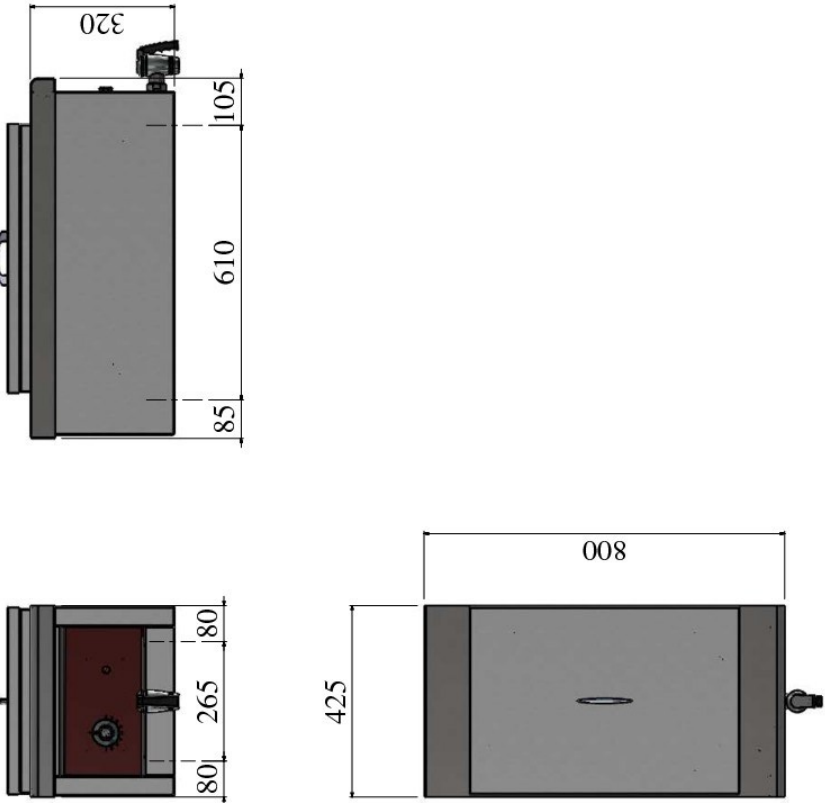





REFERENCE : 1/2 R-E1BME1/1

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01843	425 X 800 X 320/380	1~230V+E	ELEC : 1 kW	30 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
-	-
-	-
Equipment for a 24 V remote control	V00878
Stainless steel rear panel fitted in factory	V01289
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Mixer HW/CW water tap 20x27 (360°)	V00561
_V01651	V01651
Hole cut to suit client's tap	V01292



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sague</p>
						
						
     <p>1~230V + PE P: 1 kW Ø 15x21 (1/2") Ø 15x21 (1/2")</p> <p>V01843 PRO800-1/2R-E BME /1</p>						

