

## CHIP CONTAINER

## OPEN BASE

### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:  
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :  
· AISI304 Stainless steel top with a housing for removable GN1/1 container  
· enamelled front panel

- Base :  
· Open base

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-








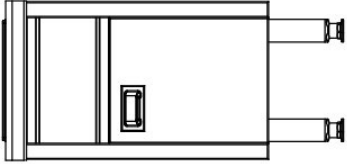
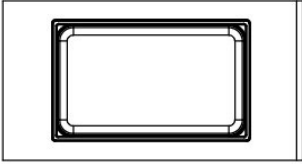
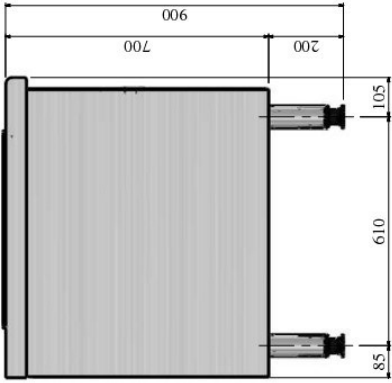
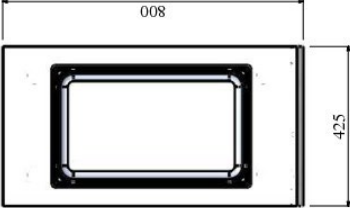





REFERENCE : 1/2 BACSAL

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V01855</b>	425 X 800 X 900	-	-	50 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
Electric socket in cupboard (1~230V+E / 13 Amps)	V01056
Overhead ceramic heater (2 kW / 2~400V+E)	V01215
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p>
 						
 						
     <p><b>V01855</b> PRO800-1/2BACSAI</p>						