

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : B-E1BME2/1



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- Top :
 - . 1 AISI 316 Bain-marie tank for GN2/1 container with a 20 mm high edge to prevent debris from falling in the tank.
 - . Perforated double bottom in AISI 304 stainless steel
 - . Drain tap underneath the tank
 - . Heating element rated 3 kW fitted underneath the tank in a tight coffer
 - . Thermostatic regulation 30-110°C with "STOP" position and "ON" light - indicator
 - . Removable lid in AISI 304 stainless steel with handle
 - . Containers and supports excluded

- Base :
 - . Open base








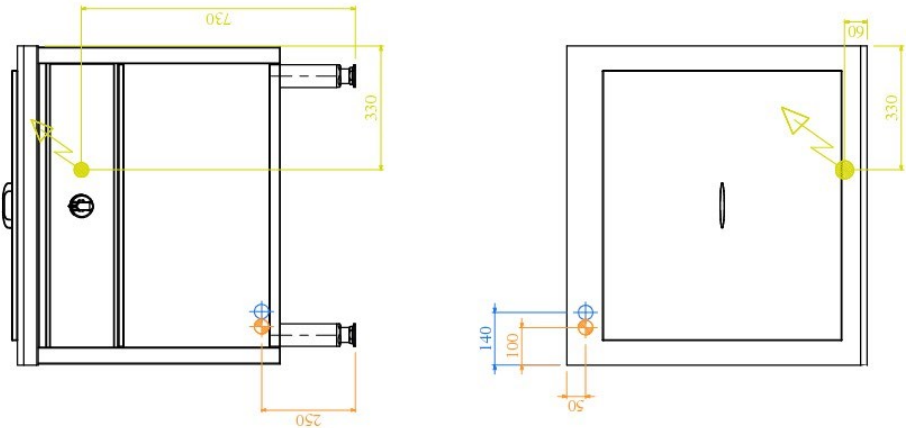
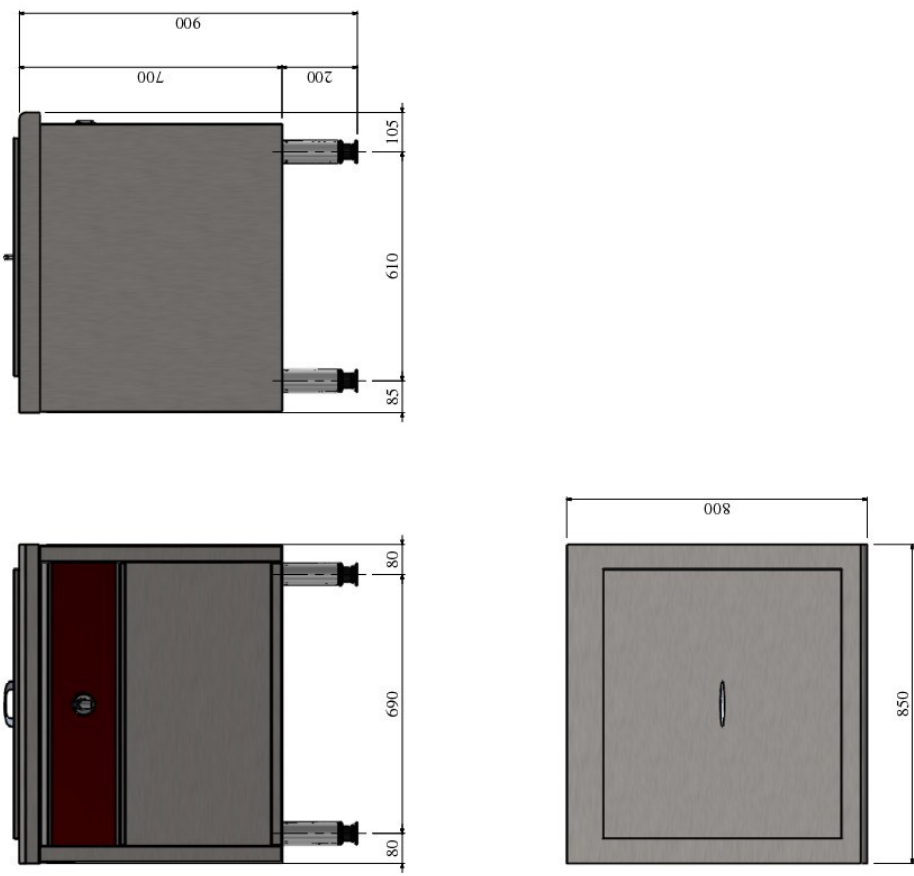





- Electrical rating : 3kW / 3~400V+E.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01950	850 X 800 X 900	3~400V+E	ELEC : 3 kW	65 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
4 x GN2/1 Electric hot cupboard (2.25kW / 3~400V+E) requires drain tap to front	V00826
Hinged doors for open base	V01813
Equipment for a 24 V remote control	V00878
Drain tap to front	V01818
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-
-	-

ACCESSORIES	CODE
Mixer HW/CW water tap 20x27 (360°)	V00561
_V01651	V01651
Hole cut to suit client's tap	V01292



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sague</p>
						
						
     <p>3~400V + PE P: 3 kW Ø 15x21 (1/2") Ø 15x21 (1/2")</p>						
<p>V01950 PRO800B-E BME2/I</p>						

