



HALF MODULE UNIT - SMALL SOLID TOP

OPEN BASE - 1 FLOOR

Pro 900

Summary

Energy : GAS	Code : V01953	Designation : B-G1PL	Dimensions (W x D x H) : 425 x 900 x 900 mm Power : 7 kW (gas) Voltage/Electric p. : Weight :
-------------------------------	--------------------------------	---------------------------------------	--

DEVICE DESCRIPTION

General description

Chassis :
Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

Top :
Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :
Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Above :

- 1 hotplates:
 - . Cast iron plate of: 420 x 600 mm with off-center plug
 - . Crown type burner, power: 7 kW with pilot burner and thermo-couple safety device
 - . "Stop - ignition - full fire - idle" valve with backlash adjustment
 - . Removable refractory elements in stainless steel formwork
 - . Cleanliness drawer in 18-10 stainless steel

Below:








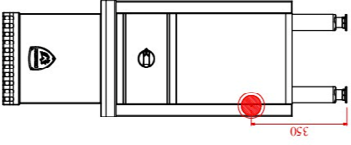

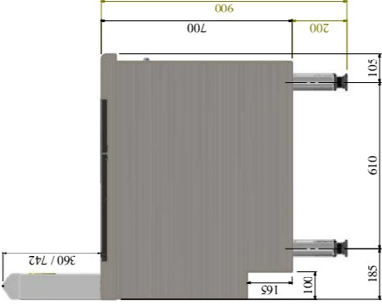







- . Open bay with removable 18-10 stainless steel floor

Natural gas flow G20/20 : 0,74
Propane gas flow G31/37 : 0,54

OPTIONS	CODE
Elec hot cupboard 4xGN2/1 in base 1~230V+E / 1,50 kW - therm. 0-30/110°C	V00825
Hinged door for open base	V01980
Electric spark ignition 1-230V+E/0,002 Kw	V00567
S/S rear panel fitted in factory W : 415/490 x H : 645 mm	V01181

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V01186



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Optionen Ausrüstung Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Weichwasseranschluss Conexión agua suavizada ≤ 3bars-7°F Wasserzulauf (get filtertes wasser) ≤ 3bars-7°F (3H) Conexión agua suavizada ≤ 3 bars-lb.-7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserlauf desagüe</p>		
								  <p>  Ø 15x21 (1/2")  1~230V + PE Ø 1.50mm²    </p> <p>v01953 PRO900-1/2B-GIPL</p>



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

