



FULL MODULE UNIT - BAIN-MARIE GN 2/1

OPEN BASE

Pro 900

Summary

Energy :

ELEC

Code :

V01978

Designation :

B-E1BME2/1

Dimensions (W x D x H) :

850 x 900 x 900 mm

Power : 3 kW (elec)

Voltage/Electric p. : 3~400V+N+E / 3

Weight :

DEVICE DESCRIPTION

General description

Chassis :

One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.

Top :

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

Natural gas flow G20/20 :

Propane gas flow G31/37 :



Above :

- . GN2 / 1 water bain-marie:
- . GN2 / 1 tank in 18-10 stainless steel with plume
- . Dimensions: 650mm W x 530mm D x 170mm H
- . Front drain valve
- . Double perforated bottom in 18-10 stainless steel
- . Heating by voltage resistors: 3 ~ 400V + N + T / power: 3 kW placed under the tank in a sealed box
- . Control and regulation by thermostat 30-110 ° C with off position power indicator light
- . Removable cover in 18-10 stainless steel with handle
- . Chassis (only if several stoves):
- . Assembly frame in 18-10 stainless steel tube 30 x 60 x 1 mm and profiles in 18-10 stainless steel sheet 30/10 thick, with plates for fixing the stoves

OPTIONS

CODE


Elec hot cupboard 4xGN2/1 in base 3~400V+N+E / 2,25 kW - therm. 0-30/110°C	V00826
Hinged doors for open base	V01576
Equipment for a 24V remote control contactor(s) not supplied	V00878
Drain tap to front 1 tank included in bridge unit/compulsory if hot cupboard	V01818
S/S rear panel fitted in factory W : 840 x H : 645 mm	V01182

ACCESSORIES

CODE

S/S clip on plinth panels H : 170 mm for standard legs	V01187



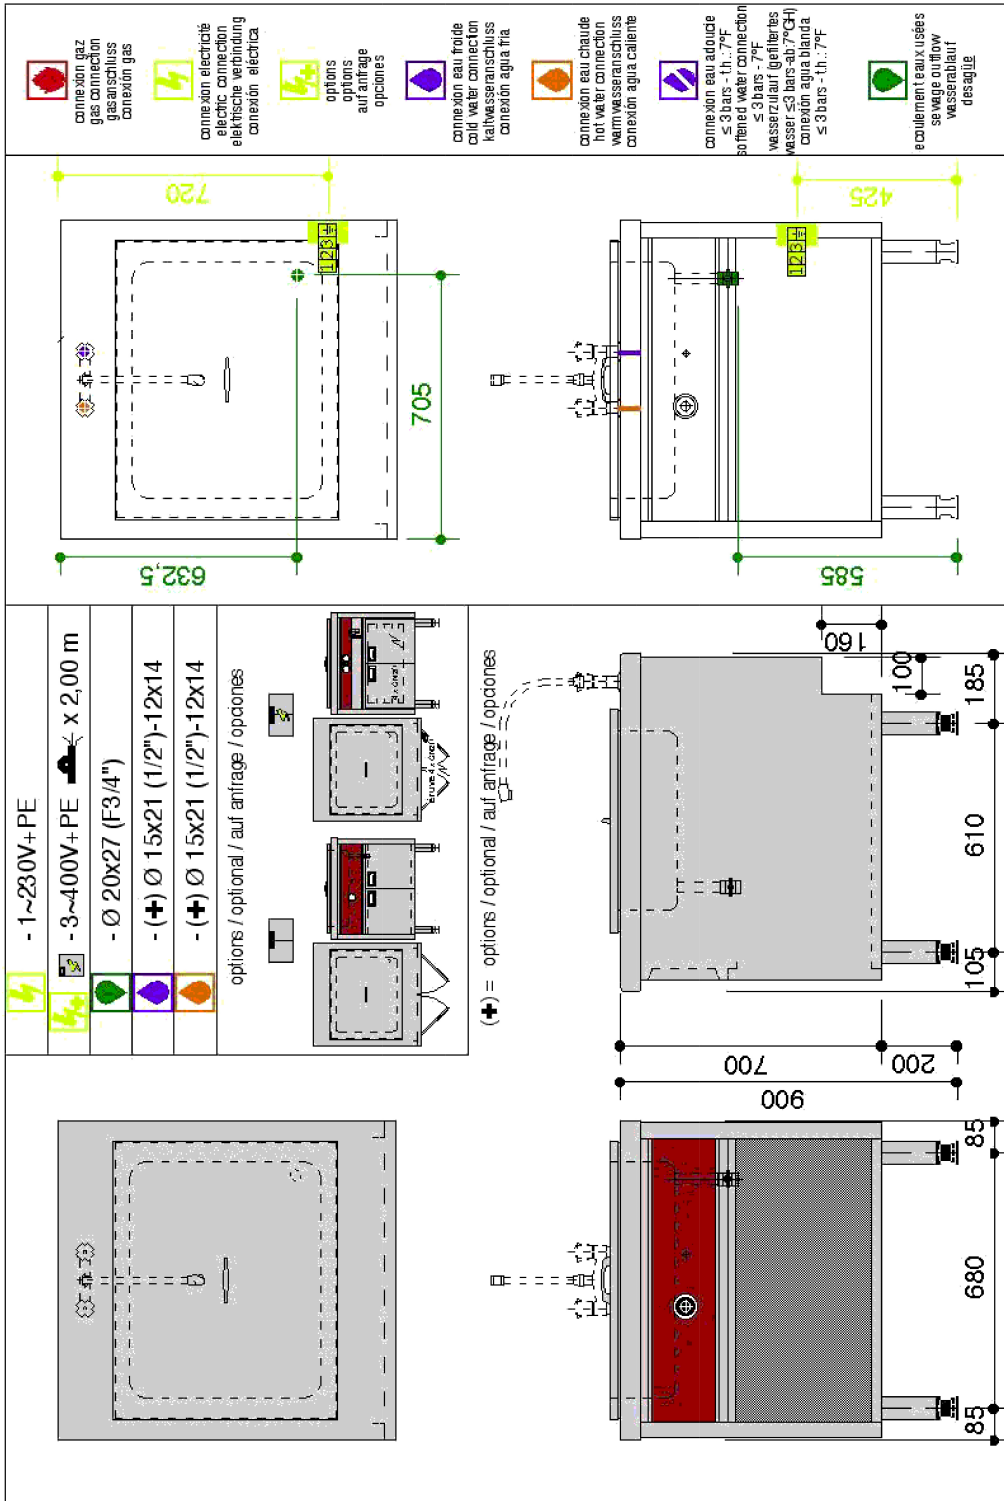

LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

