



BRAISING PANS – BRAISING PAN 40 dm²/80 L.

1~230V ELECTRIC MOTOR TILT

Pro 900

Summary

Energy :

ELEC

Code :

V02005

Designation :

E1SBE40i

Dimensions (W x D x H) :

850 x 900 x 900 mm

Power : 12,18 kW (elec)

Voltage/Electric p. : 3~400V+N+E / 12,18

Weight :

DEVICE DESCRIPTION

General description

Chassis :

One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.

Top :

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

Natural gas flow G20/20 :

Propane gas flow G31/37 :

Braising pan :

- . 40 dm² tank
- . 18-10 stainless steel tank - 10 mm thick bottom - 25/10 thick ferrule with bevelled front face fitted with a large spout.
- . internal ribs: W: 666 x D: 590 x H: 250 mm.
- . cover in 18-10 stainless steel, 15/10 thickness, with stainless steel spring hinges to keep it "open", solid round lever (stainless steel) with insulating handle.
- . tilting assisted by electric cylinder 3 ~ 400V + N + E, controlled by push buttons (tilting up or down).

Heater :

- . armored resistances plated under tank, power: 12 kW,
- . voltage 3 ~ 400V + N + E.
- . controlled by energy metering device (0 - 100%) with stop position and indicator light.
- . Overheating safety by automatic reset thermostat.



OPTIONS

CODE


Supplement for a 10-mm thick BIMETAL base ins. 18-10 s/s 2 mm thick/out. steel 8 mm thick	V02042
Equipment for a 24V remote control contactor(s) not supplied	V00878
Terminal block for energy saver device to regulate energy	V02427
Pan tilt safety cut-out included stop heating when tilting	Included
Counter balanced lid in all positions	V00569
Removable s/s drainage system fitted in the factory	V02490
S/S rear panel fitted in factory L : 840/1265 x H : 645 mm	V01182
Mixer water tap CW/HW Ø 15x21 swivel spout : 360° - on the left side	V00561
Mixer water tap CW/HW Ø 15x21 swivel spout : 180° - on the left side	V01651
Hole cut to suit client's tap - tap supplied and fitted by client - on the left side	V01292

ACCESSORIES

CODE

S/S plinth to clamp on legs H : 170 mm for standard legs	V01187
Bain-marie adapter collar for GN containers (not supplied)	V02992



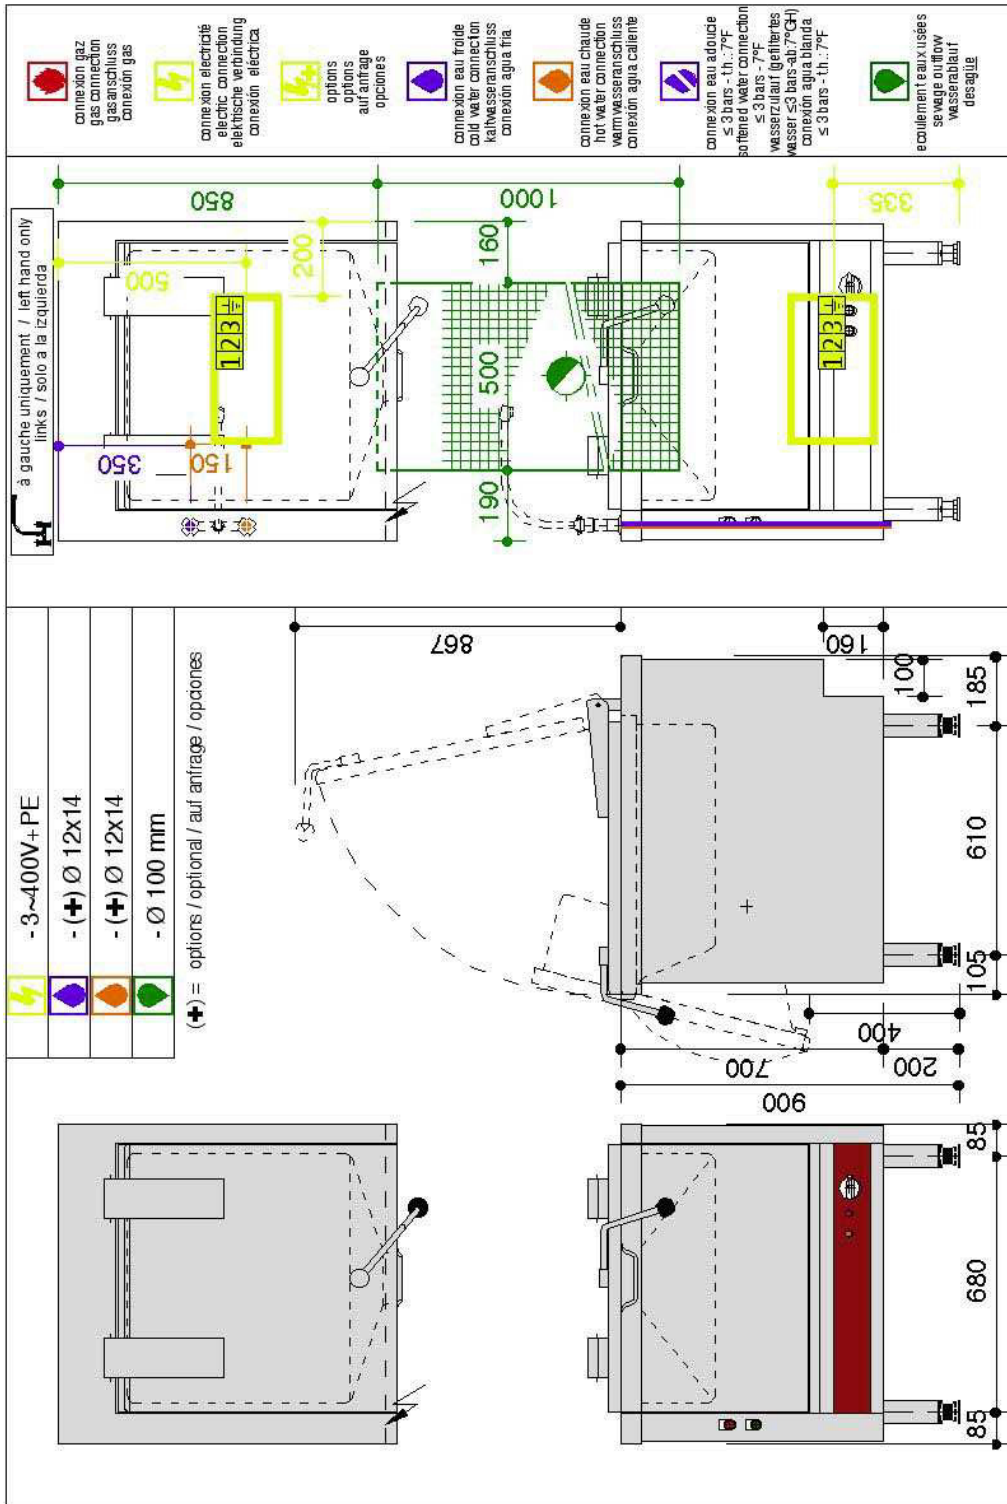

LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

