

### GENERAL DESCRIPTION

**Chassis:**  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- **Top:**  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**  
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-

REFERENCE : 1/2 N-T/P



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- **Top :**  
· AISI 304 stainless steel neutral work top with "Slide confort system" pull out utensil drawer under for an excluded GN1/1 container.








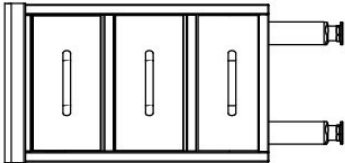

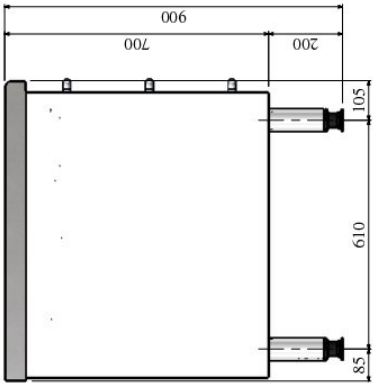
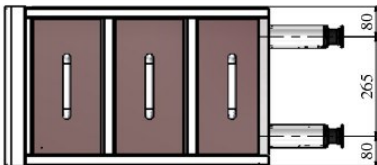
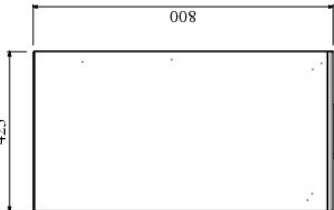

- **Base :**  
· Cupboard with 1-piece floor in stainless steel  
· Hinged door and inner door in stainless steel with magnetic hasps and handle.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V02258</b>	425 X 800 X 900	-	-	50 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
2 Lower drawers with stainless steel front panel to replace the door	V02488
Stainless steel rear panel fitted in factory	V01181
-	-
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sagüe</p>
 						
 						
  <p><b>V02258</b> PRO800-1/2N-T/P</p>						