

NEUTRAL WORKTOP

CUPBOARD WITH GN2/1

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- **Top:**
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : N-T/P



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- **Top :**
· AISI 304 stainless steel neutral work top with "Slide confort system" pull out utensil drawer under for an excluded GN2/1 container.








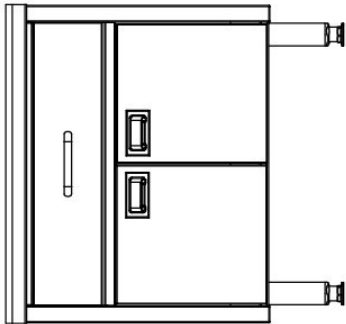
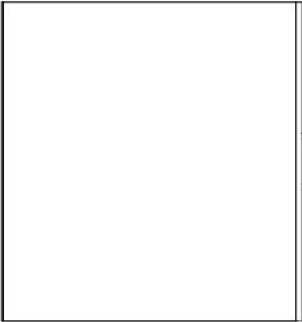
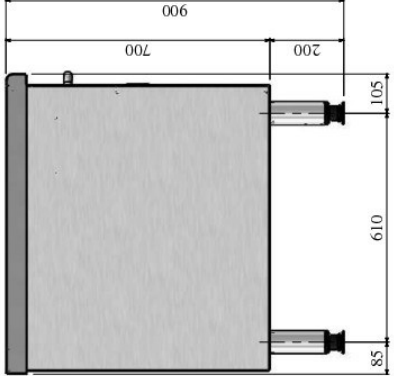
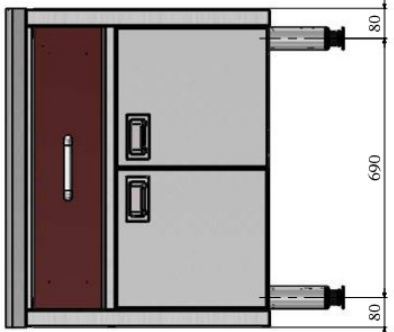
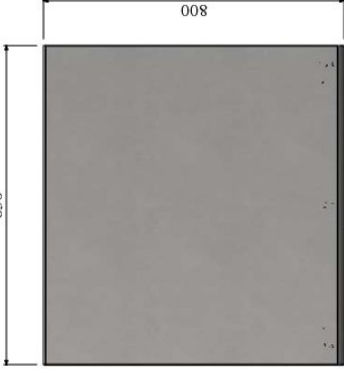





- **Base :**
· Cupboard with 2-piece floor in stainless steel
· Hinged doors and inner doors in stainless steel with magnetic hasps and handle.

| CODE | DIMENSIONS | ALIMENTATION | POWER | WEIGHT |
|---------------|-----------------|--------------|-------|--------|
| V02259 | 850 X 800 X 900 | - | - | 60 kg |

| OPTIONS | CODE |
|---|--------|
| 150 mm wide plating shelf | V00806 |
| 2 Lower drawers with front panel similar to doors | V02488 |
| Stainless steel rear panel fitted in factory | V01182 |
| - | - |
| Stainless steel plinth to clamp on legs | V01187 |
| - | - |
| - | - |
| - | - |
| - | - |
| - | - |

| ACCESSORIES | CODE |
|-------------|------|
| - | - |
| - | - |
| - | - |



| | | | | | | |
|---|---|--|--|---|--|--|
|  <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p> |  <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p> |  <p>Options Options Aufträge Opciones</p> |  <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p> |  <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p> |  <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p> |  <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p> |
|   | | | | | | |
|    | | | | | | |
|      | | | | | | |
| <p>V02259 PRO800-N-T/P</p> | | | | | | |

