

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 : -

Propane gas flow
G31/37 : -

REFERENCE : 1/2 B-E1WOK-IND



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :
 - . 1 induction wok rated 5 kW under a concave ceramic surface measuring 290 mm in diameter
 - . Adjustment by potentiometer with 'OFF' position.
 - . 'ON/OFF', 'Heating' and 'Error' indicators.

Note : Only use an appropriate pan

- Base :
 - . Open base








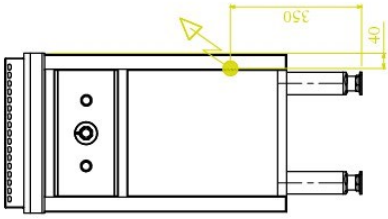
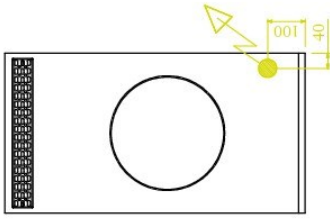
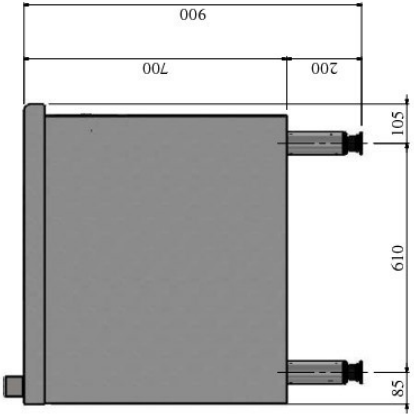
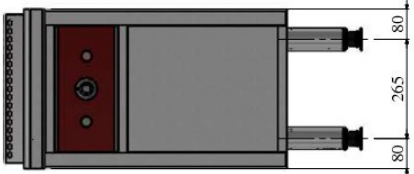
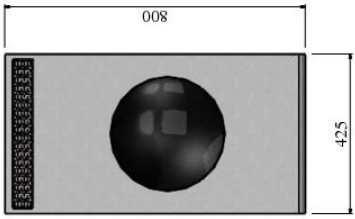





- Electrical rating : 5 kW / 3~400+E.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02265	425 X 800 X 900	3~400V+E	ELEC : 5 kW	45 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
-	-
Hinged door for open base	V01937
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h....7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h....7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p>
 						
  						
     <p>3~400V + PE P: 5 kW</p> <p>V02265 PRO800-1/2B-E WOK-IND</p>						