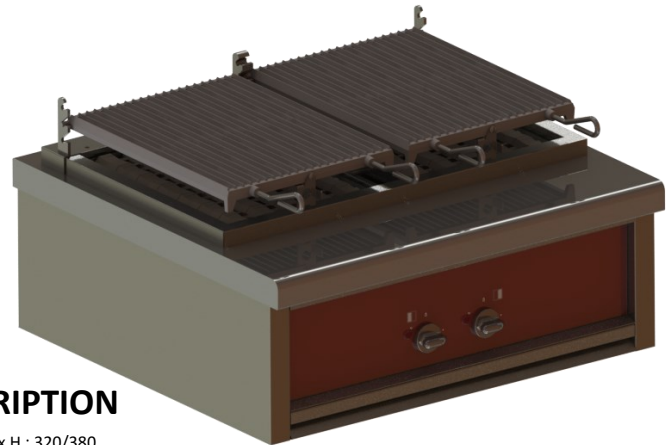


GENERAL DESCRIPTION

- Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick. Assembled by high intensity electric welding.

- Top:
AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



APPLIANCE DESCRIPTION

Dimensions (mm): W : 850 x D : 800 x H : 320/380.

- Top :
 - . Chargrill with refractory briquets.
 - . 2 cast iron griddle measuring 365x450mm each with handle and 3 positions adjustment.
 - . 2 'Multi-ramps' stainless steel burners located in a stainless steel fire box.
 - . Stainless steel support grid for briquets.
- Control : flame failure safety cut-out thermocouple; recessed gas tap (OFF/Full power/slow-down positions). . Drip tray in front, AISI 304 stainless.
- Base :
 - . Bridge unit - to lay or hang.

Natural gas flow G20/20 :	2,11 m3/h
Propane gas flow G31/37 :	1,55 kg/h









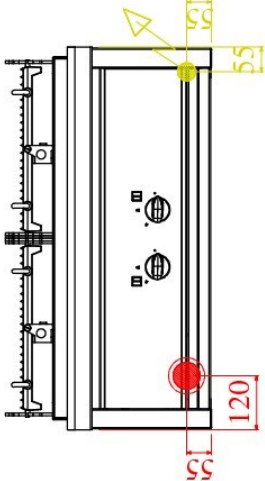
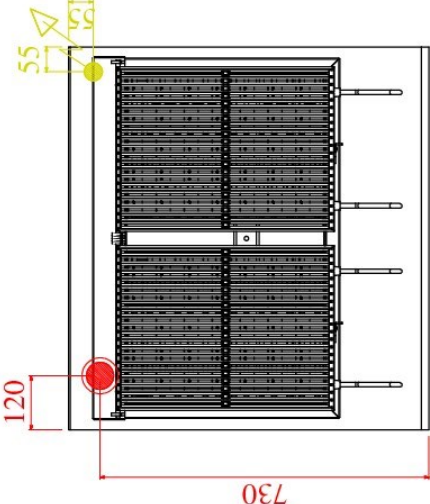
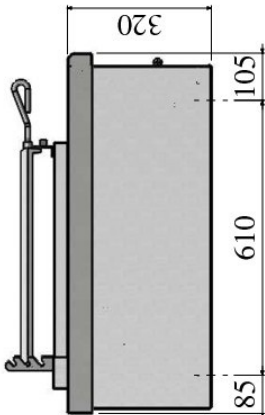
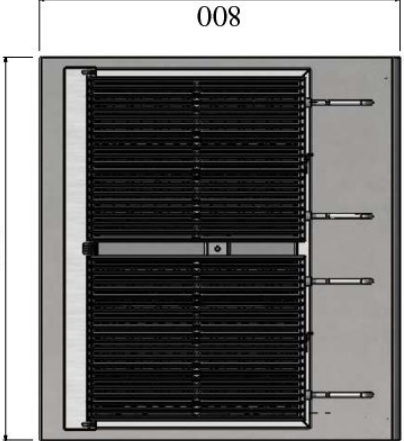





REFERENCE : R-G2GRILPIER-1B

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02379	850 X 800 X 320/380 mm	-	GAS : 20 kW	115 kg

OPTIONS	CODE
150-mm wide plating shelf - integrated into the top	V00806
Hinged doors - for open base	V01813
Electric ignition for burners - 1~230V+E /0,002 kW	V01013
S/S rear panel fitted in factory - L : 840 x H : 645 mm	V01182
S/S clip on plinth panels - 170 mm for standard legs	V01187
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Charging refractory bricks - lot 77 briquettes for 2 grills	V02251
-	-
-	-



<p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>  	<p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p> 	<p>Options Options Aufanfrage Opciones</p> 	<p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p> 	<p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p> 	<p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p> 	<p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p> 
				<p>Ø 15x21 (1/2") P: 20 kW 1~230V + PE P: 0,002 kW</p>	    	<p>V02379 Pro 800 R-G2GRILPIER-V-1B</p>

