


### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

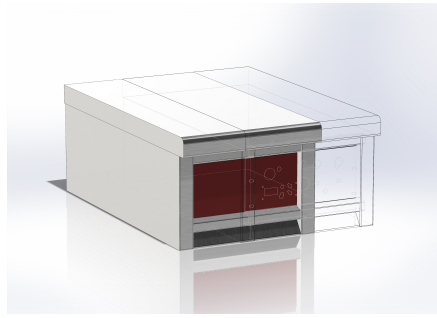

### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 300 to 415 x D : 800 x H : 320/380.

- Top :  
. Neutral worktop with enamel front panel

- Base :  
. Bridge unit

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-








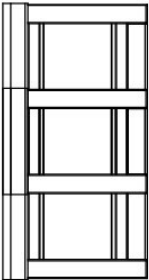
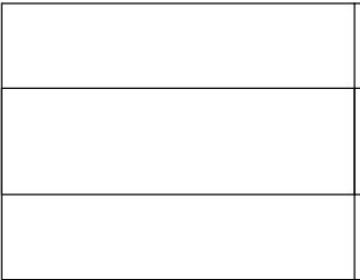
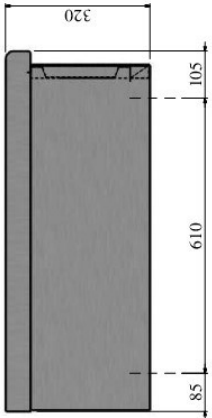
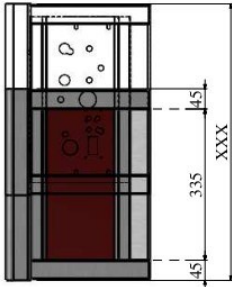
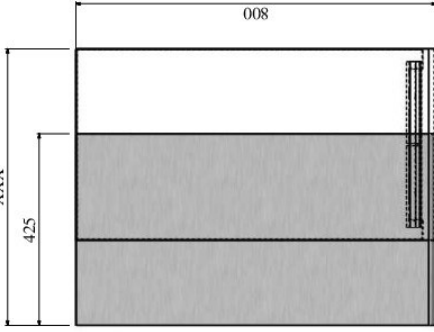





REFERENCE : 1/2R-CAISSON/SM

| CODE          | DIMENSIONS              | ALIMENTATION | POWER | WEIGHT |
|---------------|-------------------------|--------------|-------|--------|
| <b>V02448</b> | 300-415 x 800 x 320/380 | -            | -     | -      |

| OPTIONS                                      | CODE   |
|--|--------|
| 150 mm wide plating shelf                    | V00805 |
| Stainless steel rear panel fitted in factory | V01289 |
| -  | -      |
| -  | -      |
| -  | -      |
| -  | -      |
| -  | -      |
| -  | -      |
| -  | -      |
| -  | -      |
| -  | -      |

| ACCESSORIES | CODE |
|-------------|------|
| -           | -    |
| -           | -    |
| -           | -    |



|   |  |  |  |   |  |  |
|---|--|--|--|---|--|--|
|  <p>Connexion gaz<br/>Gas connection<br/>Gasanschluss<br/>Conexión gas</p>   |  <p>Connexion électrique<br/>Electric connection<br/>Elektrische verbindng<br/>Conexión eléctrica</p> |  <p>Options<br/>Options<br/>Aufanfrage<br/>Opciones</p> |  <p>Connexion eau froide<br/>Cold water connection<br/>Kaltwasseranschluss<br/>Conexión agua fría</p> |  <p>Connexion eau chaude<br/>Hot water connection<br/>Warmwasseranschluss<br/>Conexión agua caliente</p> |  <p>Connexion eau adoucie<br/>≤ 3bars-t.h...7°F<br/>Softened water connection<br/>≤ 3bars-7°F<br/>Wasserzulauf (gefiltertes<br/>wasser ≤ bars-ab: 7°C/GH)<br/>Conexión agua blanda<br/>≤ 3 bars-t.h...7°F</p> |  <p>Écoulement eaux usées<br/>sewage outflow<br/>wasserablauf<br/>desagüe</p> |
|    |  |  |  |   |  |  |
|     |  |  |  |   |  |  |
|      <p><b>V02448 1/2R-CAISSON/SM PRO800</b></p> |  |  |  |   |  |  |