


## DEEP FAT FRYER WITH COLD ZONE 2 X 7 L.

## BRIDGE UNIT

### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

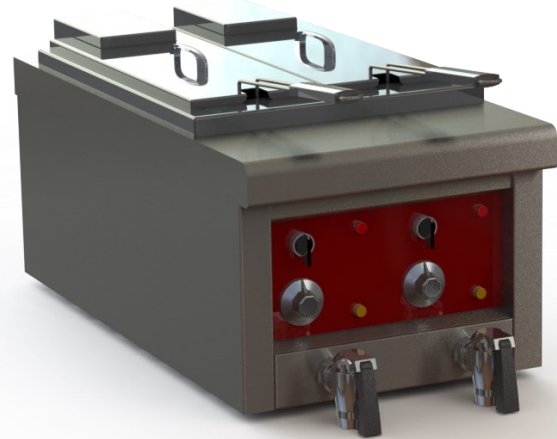

### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 380

- Top :
  - . 2x7 litre capacity 1 mm thick AISI 304 stainless steel tanks with cold and heat zones.
  - . 20 mm high edge to prevent debris from falling in the cooking oil
  - . Oil level warning marks
  - . Drain tap to front
  - . Removable lid in AISI 304 stainless steel, 1 mm thick
  - . Electric heating : with removable immersed element rated 8 kW each

- Control and safety :
  - . On/Off switch, control thermostat and indicator lights
  - . Safety thermostat with manual reset
  - . Safety micro-switch to secure the position of the immersed element

- Accessory :
  - . 2 nickel coated fryer baskets

- Base :
  - . Bridge unit

Electrical rating : 16 kW / 3~400V+E

Output 36 kg/h blanched chips

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-








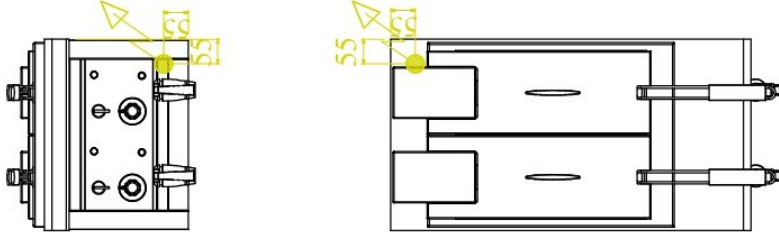
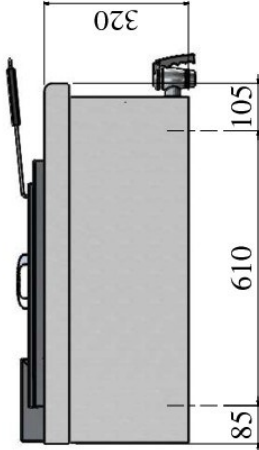
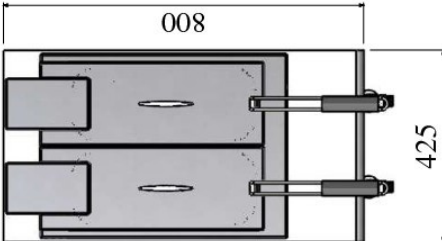





REFERENCE : 1/2 R-E2FR0708

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02450	425 X 800 X 380	3~400V+E	ELEC : 16 kW	50 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
Stainless steel rear panel fitted in factory	V021289
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Fryer basket	09138A
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p>
						
						
     <p>3~400V + PE P: 16 kW</p>						
<p><b>V02450</b> PRO800-1/2R-E2FR0708</p>						