

NEUTRAL WORKTOP

TECHNICAL CUPBOARD

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- **Top:**
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 : -

Propane gas flow
G31/37 : -

REFERENCE : 1/2 PLAC/P-LAT



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- **Top :**
. Neutral worktop










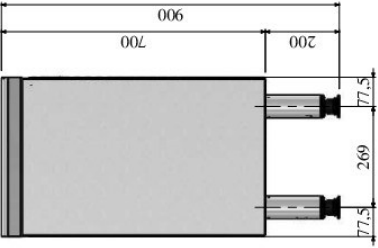
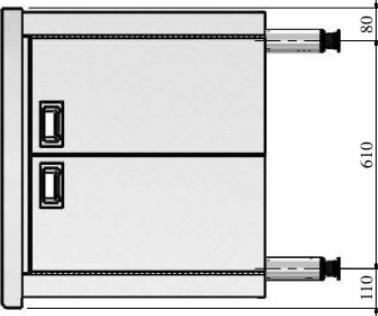






- **Base :**
. Cupboard with 1-piece floor in stainless steel
. Hinged doors and inner doors in stainless steel with magnetic hasps and handle on side.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02461	425 X 800 X 900	-	-	40 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
 						
   <div style="display: flex; justify-content: space-around; align-items: center;">      </div> <p style="text-align: right;">V02461 PRO 800-1/2PLAC/P-LAT</p>						