

DEEP FAT FRYER WITH COLD ZONE 2 X 7 L.

TECHNICAL CUPBOARD

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : 1/2 E2FR0708



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :**
- . 2x7 litre capacity 1 mm thick AISI 304 stainless steel tanks with cold and heat zones.
 - . 20 mm high edge to prevent debris from falling in the cooking oil
 - . Oil level warning marks
 - . Drain tap to front - Removable lid in AISI 304 stainless steel, 1 mm thick
 - . Electric heating with removable immersed element rated 8 kW

Control and safety :

- . On/Off switch, control thermostat and indicator lights
- . Safety thermostat with manual reset - Safety micro-switch to secure the position of the immersed element

- Accessory :

- . 2 nickel coated fryer baskets

- Base :

- . Cupboard with 1-piece floor in stainless steel
- . Hinged door and inner door in stainless steel with magnetic hasps and handle
- . Collection bucket in cupboard with oil filter mesh








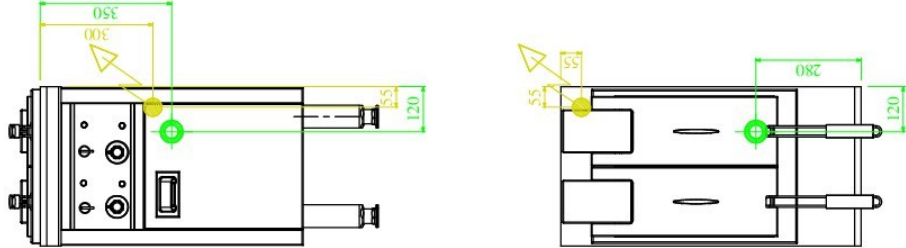
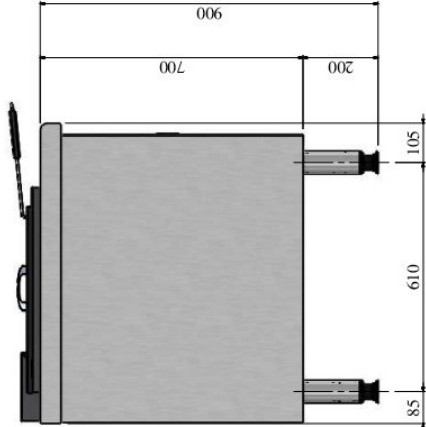
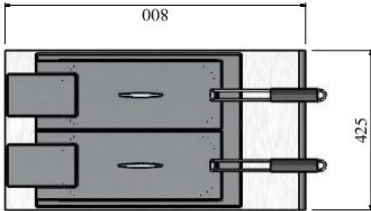
Electrical rating : 16 kW / 3~400V+E
Output 36 kg/h blanched chips

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02485	425 X 800 X 900	3~400V+E	ELEC : 16 kW	60 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Fryer basket	09138A
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindng Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
 <p data-bbox="1219 1227 1299 1496">3~400V + PE P: 16 kW</p> <p data-bbox="1410 1756 1442 2092">V02485 PRO800-1/2B-E2FR0708</p>						