

## 4 RADIANT HOB

## BRIDGE UNIT

### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 320/380.

- Top :
  - . 2 sets of 2 radiant hobs measuring 300x300mm and rated 4 kW, under a silkscreen ceramic surface measuring 360x620x6mm.
  - . Regulation by simmerstats with 'OFF' position and safety thermostats.
  - . Indicator lights
- Base :
  - . Bridge unit
- Electrical rating : 16kW / 3~400V+E

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-








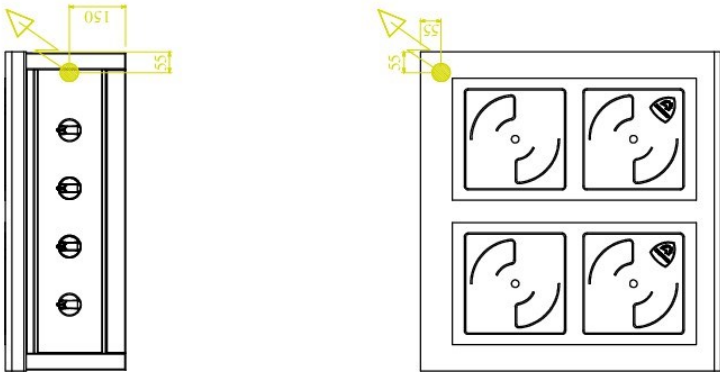
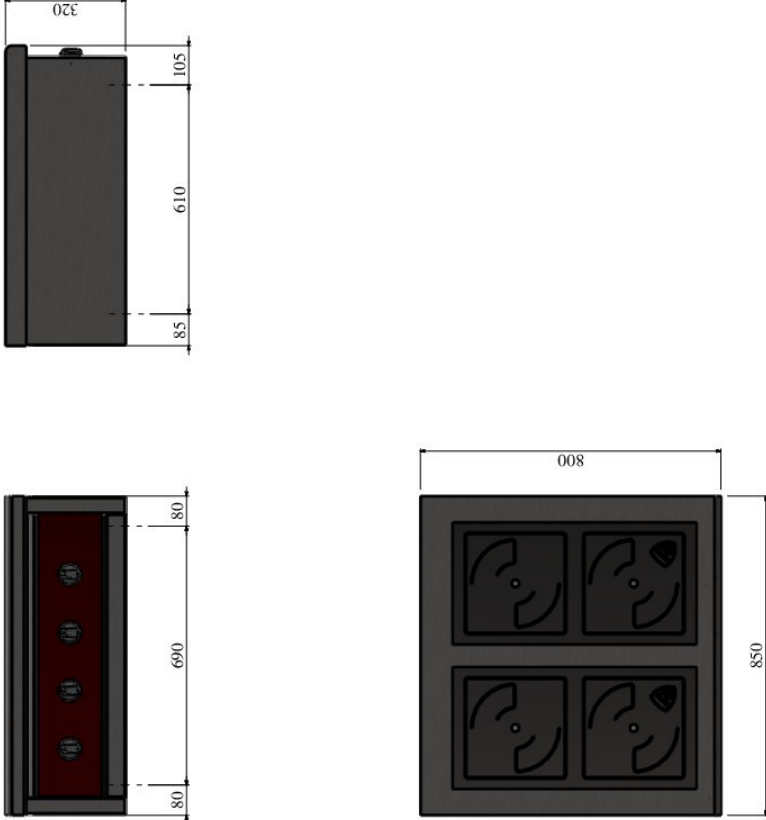





REFERENCE : R-E4RAY/A

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V02502</b>	850 X 800 X 320/380	3~400V+E	ELEC : 16 kW	65 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
Set of 2 pan detectors	V01140
Stainless steel rear panel fitted in factory	V01290
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
     <p><b>3~400V + PE P: 16 kW</b></p> <p><b>V02502 PRO800R-E4RAY/A</b></p>						