

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : 1/2 B-E2RAY/A



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :
. 1 set of 2 radiant hobs measuring 300x300mm rated 4 kW under a silkscreen ceramic surface measuring 360x620x6mm each rated 4kW.
. Regulation by simmerstats with 'OFF' position and safety thermostats.
. Indicator lights








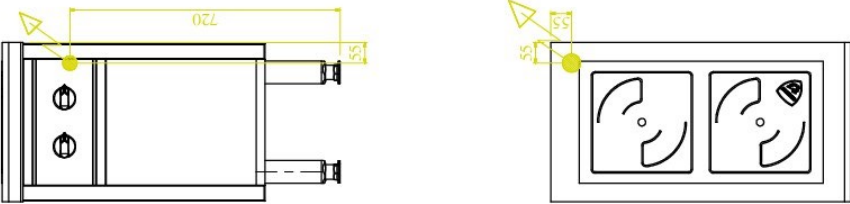
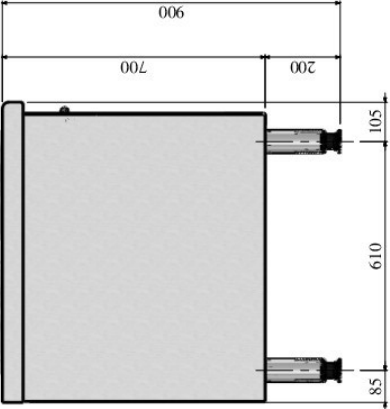
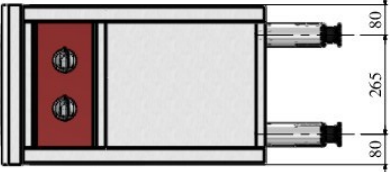
- Base :
. Open base

- Electrical rating : 8kW / 3~400+E

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02503	425 X 800 X 900	3~400V+E	ELEC : 8 kW	55 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
-	-
Hinged door for open base	V01937
-	-
Set of 2 pan detectors	V01140
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
 <p data-bbox="1222 1245 1302 1509">3~400V + PE P: 8 kW</p> <p data-bbox="1414 1756 1437 2092">V02503- PRO800-1/2B-E2RAY/A</p>						

