

GENERAL DESCRIPTION

Chassis:

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:

AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 320/380

- Top :

- . 1 set of 2 radiant hobs measuring 300x300mm rated 4 kW under a silkscreen ceramic surface measuring 360x620x6mm each rated 4kW.
- . Regulation by simmerstats with 'OFF' position and safety thermostats.
- . Indicator lights

- Base :

- . Bridge unit

- Electrical rating : 8kW / 3~400+E

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :









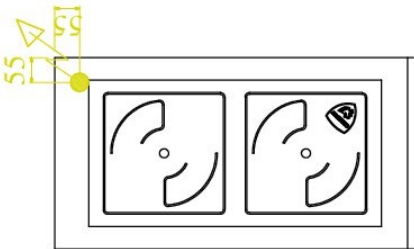
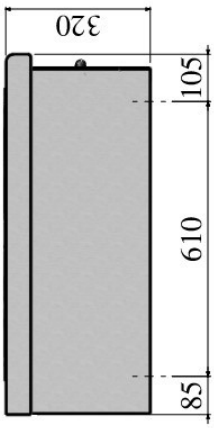

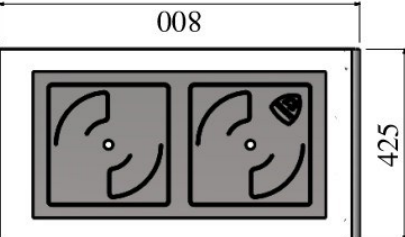





-

REFERENCE : 1/2 R-E2RAY/A

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02504	425 X 800 X 320/380	3~400V+E	ELEC : 8 kW	45 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
-	-
-	-
-	-
Set of 2 pan detectors	V01140
Stainless steel rear panel fitted in factory	V01289
-	-
-	-
-	-
-	-
ACCESSORIES	CODE
-	-
-	-
-	-



 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Options Aufanfrage Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Softened water connection ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F	 Ecoulement eaux usées sewage outflow wasserablauf desagüe
						
					     3~400V + PE P: 8 kW	V02504 PRO800-1/2RE2RAY/A