

BRATT PAN 33 dm² / 66 l

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mm. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : G1SBE33i



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.








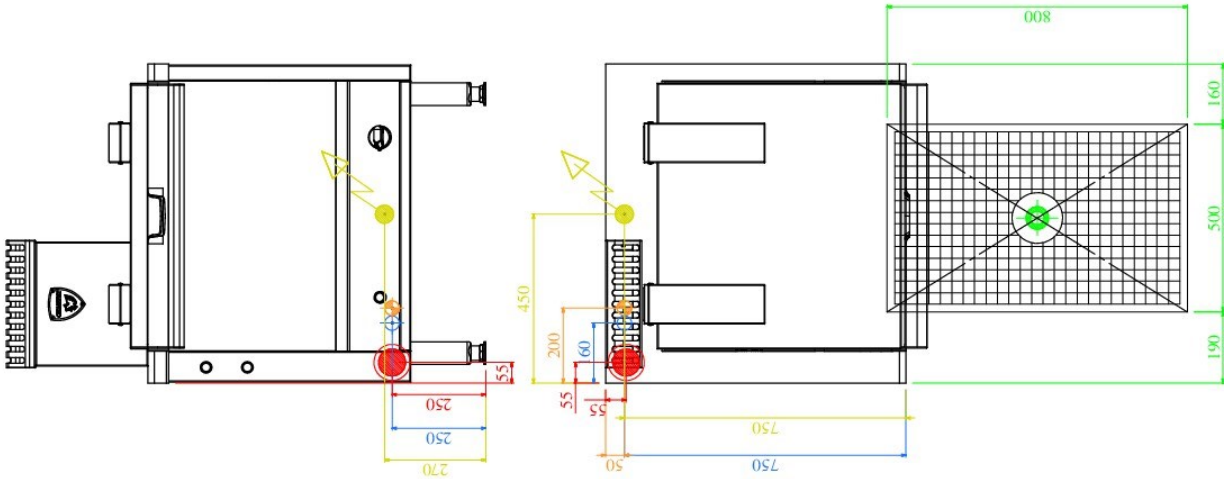
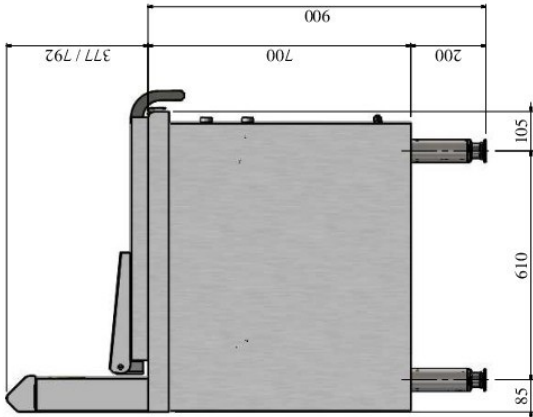
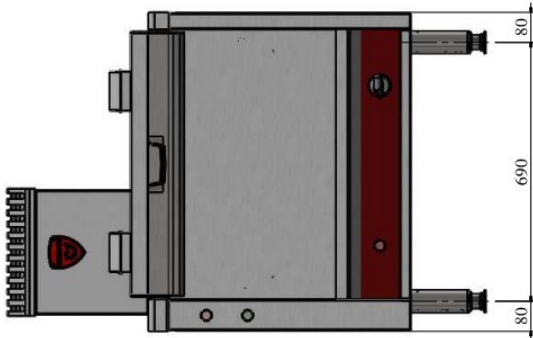
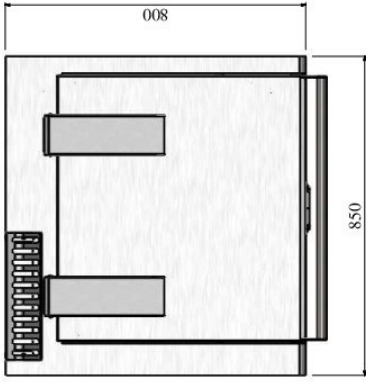
- Features :
 - . 33 dm² (66l) Stainless steel tank measuring W : 670 x D : 490 x H : 250 (mm internal) with a 10 mm thick base and built-in front pouring spout.
 - . Electric tilting by electromechanical linear actuator
 - . Stainless steel lid with tubular handle, stainless steel spring hinges.
- . Enamelled steel 'Multi-ramps' burner with pilot light and flame failure safety cut-out thermocouple; recessed gas tap control (OFF/ignition/full power/slow-down positions).
- . Electric sparking ignition.
- Gas rating : 17.4 kW
- Electrical rating : 0.2 kW / 3~400+N+E.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02512	850 X 800 X 900	1~230V+E	GAS : 17.4 kW	165 kg

OPTIONS	CODE
10 mm thick Bimetal bottom	V01817
Simmertat control with pan tilt safety cut-out	V01164
Pan tilt safety cut-out (1~230V+E)	V01060
-	-
Counter balanced lid	V00569
Removable stainless steel strainer	V02489
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-

ACCESSORIES	CODE
Mixer HW/CW water tap 20x27 (360°)	V00561
_V01651	V01651
Hole cut to suit client's tap	V01292



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindng Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
				<p>Ø 15x21 (1/2") P: 17,4 kW 1~230V + PE P: 0,18 kW 3~400V + N + PE P: 0,18 kW</p>	<p>Ø 15x21 (1/2") Ø 15x21 (1/2") Ø 100 mm</p>	<p>V02512 PRO800G1SBE33I</p>