

## DEEP FAT FRYER WITH COLD ZONE 25 l.

## FILTRATION UNIT

### GENERAL DESCRIPTION

**Chassis:**  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

**- Top:**  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

**- Legs:**  
200 mm high AISI 304 stainless steel legs, diam.: 60 mm. Adjustable PVC feet (0 / + 30).

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-

REFERENCE : 1/2 E1FR2525/MF



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :
  - . 25 l capacity tank, 2 mm thick AISI304 stainless steel with cold zone, and 20 mm high edge to prevent debris from falling in the cooking oil.
  - . Oil level indicator marks
  - . Drain tap underneath the tank
  - . Hinged lid in AISI 304 stainless steel , 1 mm thick AISI 304
  - . Electric heating with removable immersed element rated 25 kW

- Control and safety :**
- . On/Off switch, control thermostat and indicator lights
  - . Safety thermostat with manual reset
  - . Safety micro-switch to secure the position of the immersed element

- Accessory :**
- . 2 nickel coated fryer basket








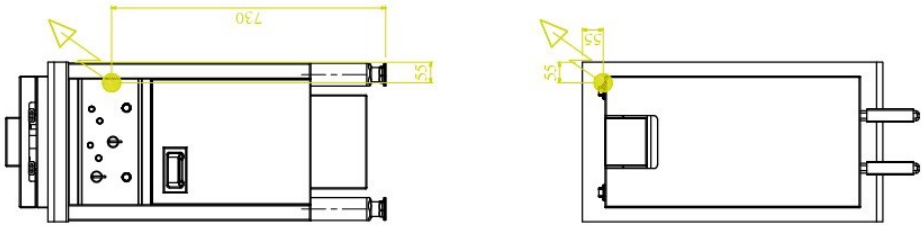
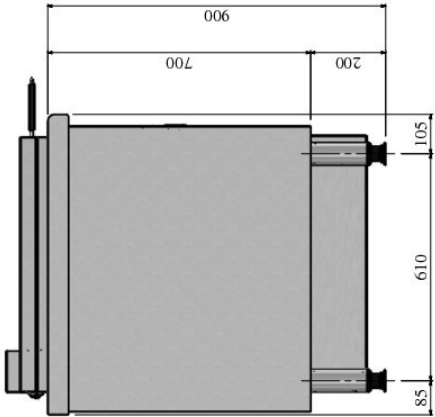
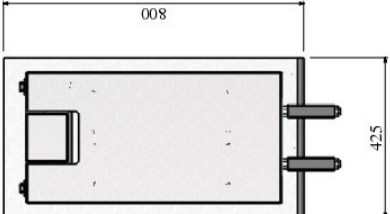





- Base :**
- . Removable integrated filtration bucket with pump on runners.
  - . Filtration through a micro perforated stainless steel grid.
  - . Up to 3 other fryers connectable with a selection by a system of ball taps
  - . Device for drainage to an excluded waste container.
  - . Light indicator.
  - . 70°C safety thermostat
  - . Hinged door and inner door in stainless steel with magnetic hasps and handle

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02605	425 X 800 X 900	3~400V+E	ELEC : 25 kW	85 kg

Electrical rating : 25 kW / 3~400V+E

OPTIONS	Output 55 kg/h blanched chips	CODE
150 mm wide plating shelf		V00805
Automatic lift for 1 large basket (1~230V+E)		V00986
Electronic regulation (230 V+E)		V01180
-		-
Equipment for a 24V remote control		V00878
Terminal block for energy saver device		V02427
-		-
-		-
Stainless steel rear panel fitted in factory		V01181
-		-
ACCESSORIES		CODE
Fryer basket		08199A
1/2 fryer baskets		08200A
-		-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p>
						
						
 <p data-bbox="1220 1220 1316 1512">        3~400V + N + PE P: 25 kW  1~230V + PE P: 0.162 kW </p> <p data-bbox="1412 1736 1444 2094"><b>V02605</b> PRO800-1/2E FR2525/MF</p>						