

BRATT PAN 33 DM² / 66 L

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- **Top:**
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- **Legs:**
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : E1SBM33i



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- Features :

. 33 dm² (66l) Stainless steel tank measuring W : 670 x D : 490 x H : 250 (mm internal) with a 10 mm thick base and built-in front pouring spout.

. Manual tilting with uncoupling gear system controlled by handwheel in front

. Stainless steel lid with tubular insulated handle, stainless steel spring hinges.

. Set of flat heating element fixed underside the tank rated 10.2 kW.

. Control by simmerstat 0-100% with "OFF" position

. Over heating safety cut-out device

. Light indicator








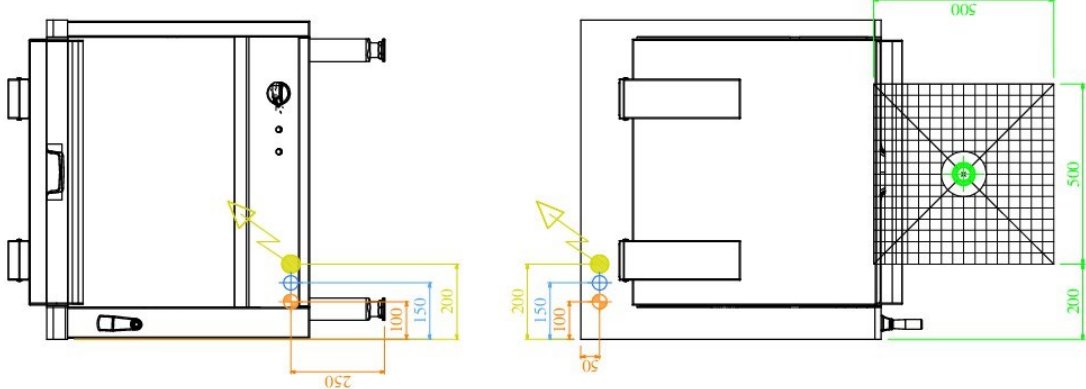
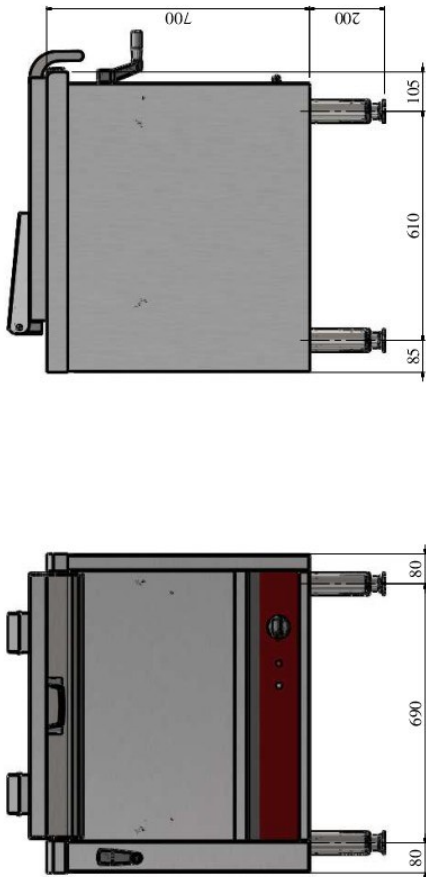
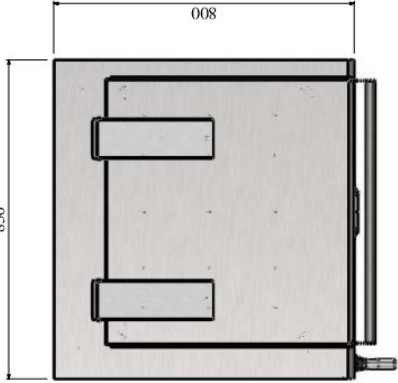





- Electrical rating : 10.2 kW / 3~400+E.

| CODE | DIMENSIONS | ALIMENTATION | POWER | WEIGHT |
|---------------|-----------------|--------------|----------------|--------|
| V02685 | 850 X 800 X 900 | 3~400V+E | ELEC : 10.2 kW | 165 kg |

| OPTIONS | CODE |
|--|--------|
| 10 mm thick Bimetal bottom | V01817 |
| Equipment for a 24V remote control | V00878 |
| Terminal block for energy saver device | V02427 |
| Pan tilt safety cut-out | V01061 |
| Counter balanced lid | V00569 |
| Removable stainless steel strainer | V02489 |
| Stainless steel rear panel fitted in factory | V01182 |
| Stainless steel plinth to clamp on legs | V01187 |
| - | - |
| - | - |

| ACCESSORIES | CODE |
|------------------------------------|--------|
| Mixer HW/CW water tap 20x27 (360°) | V00561 |
| Mixer HW/CW water tap 20x27 (180°) | V01651 |
| Hole cut to suit client's tap | V01292 |



| | | | | | | |
|--|---|--|--|---|--|--|
|  <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p> |  <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p> |  <p>Options Options Aufanfrage Opciones</p> |  <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p> |  <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p> |  <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p> |  <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p> |
|  | | | | | | |
|  | | | | | | |
|  <p data-bbox="1219 1525 1445 1576">   3~400V +PE / 10.2 kW  15x21 (1/2")  15x21 (1/2")  Ø100 </p> <p data-bbox="1410 1794 1442 2101">V02685 PRO800-E1SBMI-33</p> | | | | | | |