



**BRAISING PANS – BRAISING PAN 40 dm<sup>2</sup>/80 L.**

**MANUAL WHEEL TILT**

**Pro 900**

**Summary**

**Energy :**

**ELEC**

**Code :**

**V02687**

**Designation :**

**E1SBM40i**

**Dimensions (W x D x H) :**  
850 x 900 x 900 mm  
**Power : 12 kW (elec)**  
**Voltage/Electric p. : 3~400V+N+E / 12**  
**Weight :**

**DEVICE DESCRIPTION**

**General description**

**Chassis :**

One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.

**Top :**

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

**Base :**

Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

**Natural gas flow G20/20 :**

**Propane gas flow G31/37 :**



**Braising pan :**

- . 40 dm<sup>2</sup> tank
- . 18-10 stainless steel tank - 10 mm thick bottom - 30/10 thick ferrule with beveled front face and large integrated spout.
- . Internal ribs (mm): W: 666 x D: 590 x H: 250 mm.
- . Cover in 18-10 stainless steel, 15/10 thick, with stainless steel spring hinges for "open" handhold and tube lever with insulating handle

. Direct manual tilting by crank and release device

. Assistance by reducer and chain


**Heating :**

- . Armored resistances placed under the bottom of the tank, power: 12 kW - voltage 3 ~ 400V + N + T
- . Controlled by an energy metering device (0 - 100%) with off position and indicator light.
- . Overheating safety by thermostat with manual reset.

OPTIONS	CODE
Supplement for a 10-mm thick BIMETAL base ins. 18-10 s/s 2 mm thick/out. steel 8 mm thick	V02042
Equipment for a 24V remote control contactor(s) not supplied	V00878
Terminal block for energy saver device to regulate energy	V02427
Pan tilt safety cut-out included stop heating when tilting	Included
Counter balanced lid in all positions	V00569
Removable s/s drainage system - fitted in the factory	V02490
S/S rear panel fitted in factory L : 840/1265 x H : 645 mm	V01182
Mixer water tap CW/HW Ø 15x21 swivel spout : 360° - on the left side	V00561
Mixer water tap CW/HW Ø 15x21 swivel spout : 180° - on the left side	V01651
Hole cut to suit client's tap - tap supplied and fitted by client - on the left side	V01292

ACCESSORIES	CODE
S/S plinth to clamp on legs H : 170 mm for standard legs	V01187
Bain-marie adapter collar for GN containers (not supplied)	V02992



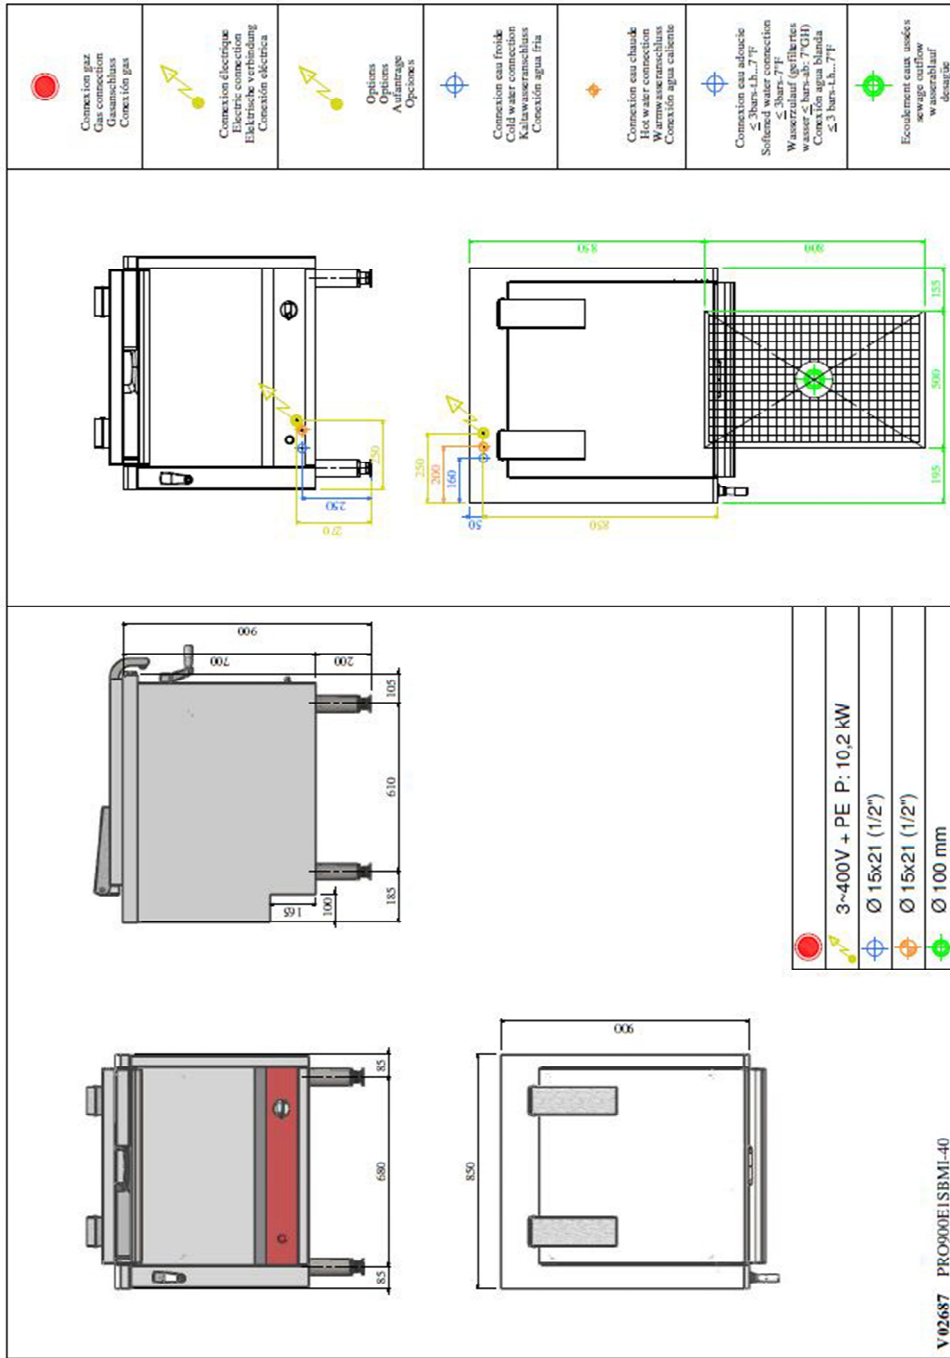

LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

