

## DEEP FAT FRYER WITH COLD ZONE 7 l.

## TECHNICAL CUPBOARD

### GENERAL DESCRIPTION

**Chassis:**  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

**- Top:**  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

**- Legs:**  
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-

REFERENCE : 1/2 E1FR0708-D



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :**
- . 7L capacity tanks, 1 mm thick AISI 304 stainless steel, with cold and heat zones and a 20 mm high edge to prevent debris from falling in the cooking oil
  - . Oil level warning marks
  - . Drain tap to front
  - . Removable lid in AISI 304 stainless steel, 1 mm thick AISI 304 stainless steel
  - . Electric heating with removable immersed element rated 8 kW

- Control and safety :**
- . On/Off switch, control thermostat and indicator lights
  - . Safety thermostat with manual reset
  - . Safety micro-switch to secure the position of the immersed element

- Accessory :**
- . 1 nickel coated fryer basket

- Base :**
- . Cupboard with 1-piece floor in stainless steel
  - . Hinged door and inner door in stainless steel with magnetic hasps and handle
  - . Collection bucket in cupboard with oil filter mesh

Electrical rating : 8 kW / 3~400V+E








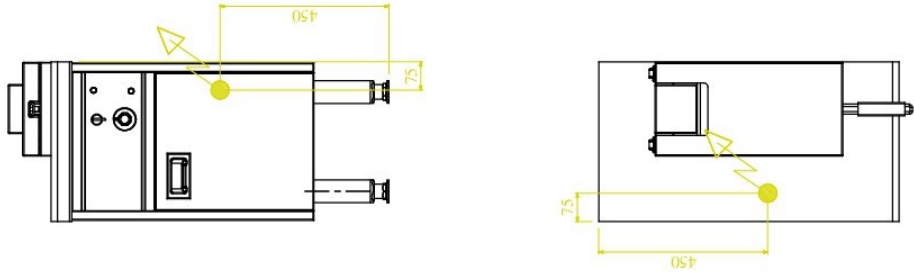
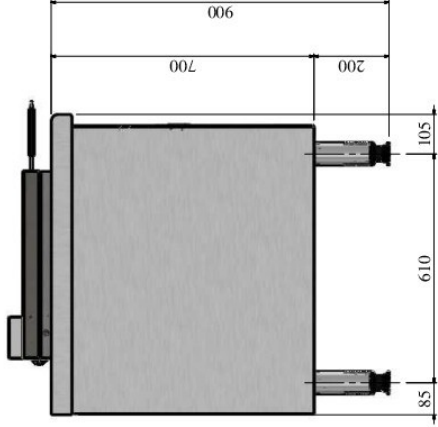
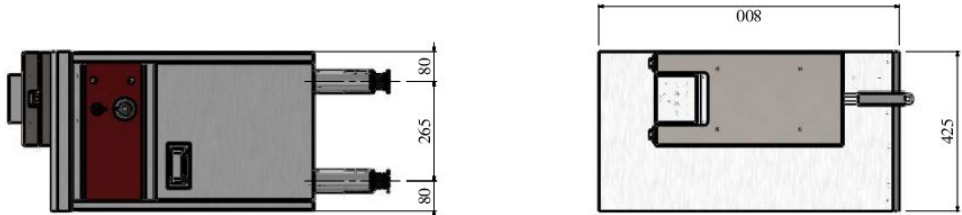





Output 18 kg/h blanched chips

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V02702</b>	425 X 800 X 900	3~400V+E	ELEC : 8 kW	55 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Fryer basket	09138A
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h....7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h....7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
						
     <p>3~400V + PE P: 8 kW</p>						
<p><b>V02702</b> PRO800-1/2E FR0708-D</p>						

