

GRIDDLE OVER WATER TANK

OPEN BASE

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : 1/2 B-E1GRBE/FTE



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :**
- . Openwork cast iron griddles measuring 350x500 mm with slots to allow grease to fall into water bath below.
 - . Water spout controlled by a tap in front fitted in the tank to fill up the tank without removing the griddle
 - . Drainage by removable waste upstand (appliance shall be connected to the mains drainage)
 - . Tubular armoured element fitted in a recess underneath the griddle mounted on hinges for easy cleaning.
 - . Control by a 0-100% range simmerstat with 'OFF' position
 - . Light indicator.








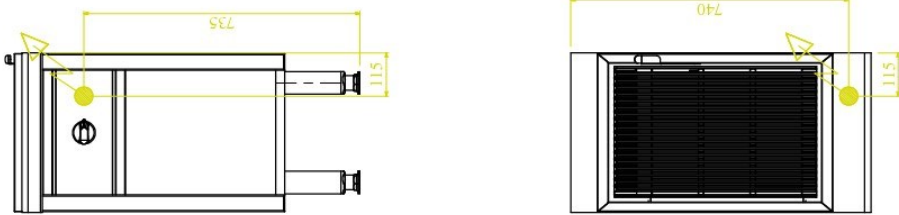
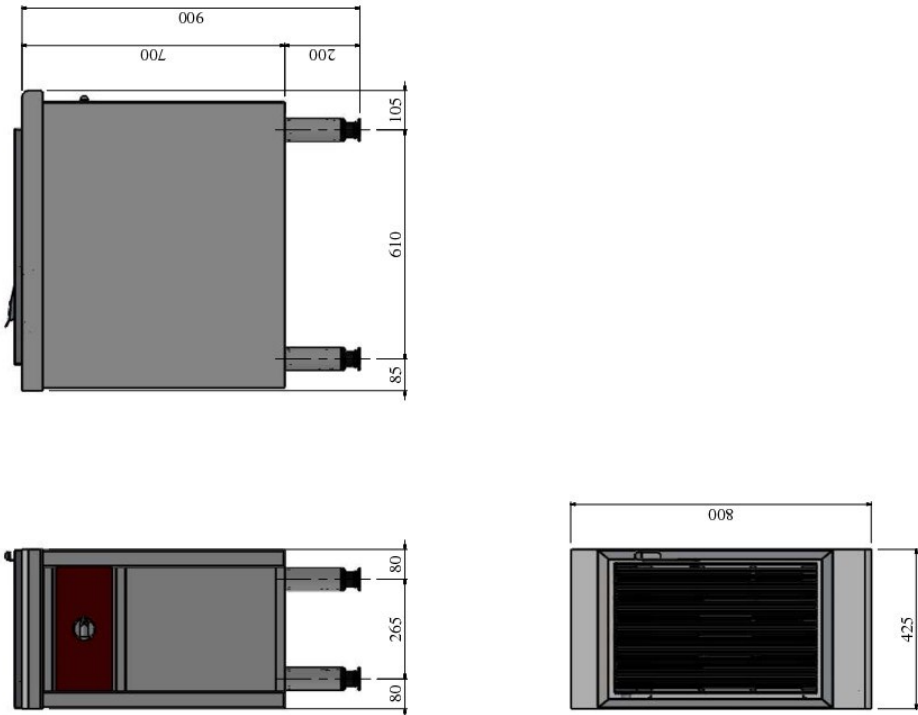





- Base:**
- . Open base

- Electrical rating : 6kW / 3~400+E.

| CODE | DIMENSIONS | ALIMENTATION | POWER | WEIGHT |
|---------------|-----------------|--------------|-------------|--------|
| V02785 | 425 X 800 X 900 | 3~400V+E | ELEC : 6 kW | 60 kg |

| OPTIONS | CODE |
|--|--------|
| 150 mm wide plating shelf | V00805 |
| - | - |
| Hinged door for open base | V01937 |
| Equipment for a 24 V remote control | V00878 |
| Drain tap to front | V01818 |
| Stainless steel rear panel fitted in factory | V01181 |
| Stainless steel plinth to clamp on legs | V01186 |
| - | - |
| - | - |
| - | - |
| ACCESSORIES | CODE |
| - | - |
| - | - |
| - | - |



| | | | | | | |
|---|---|--|--|---|--|--|
|  <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p> |  <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p> |  <p>Options Options Aufanfrage Opciones</p> |  <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p> |  <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p> |  <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p> |  <p>Ecoulement eaux usées sewage outflow wasserablauf de-sage</p> |
|  | | | | | | |
|  | | | | | | |
|      | | | | | | |
| <p>3~400V + PE P: 6 kW</p> | | | | | | |
| <p>V02785 PRO800-1/2B-E GRBE/FTE</p> | | | | | | |

