

PAELLA BURNER

OPEN BASE

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow G20/20 :	2,54 l/h
------------------------------	----------

Propane gas flow G31/37 :	1,86 kg/h
------------------------------	-----------

REFERENCE : B-G1FP



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- Top :
 . 1 set of 3 burners rating 24 kW (centre 8.5 kW, intermediate 24kW external 8kW) under a 600x600mm enameled steel pan support
 . Pilot light and flame failure safety cut-out thermocouple; recessed gas tap control (OFF/ignition/full power/slow-down positions).
 . Electric sparking ignition.
 . Drip tray in front

- Base :
 . Open base








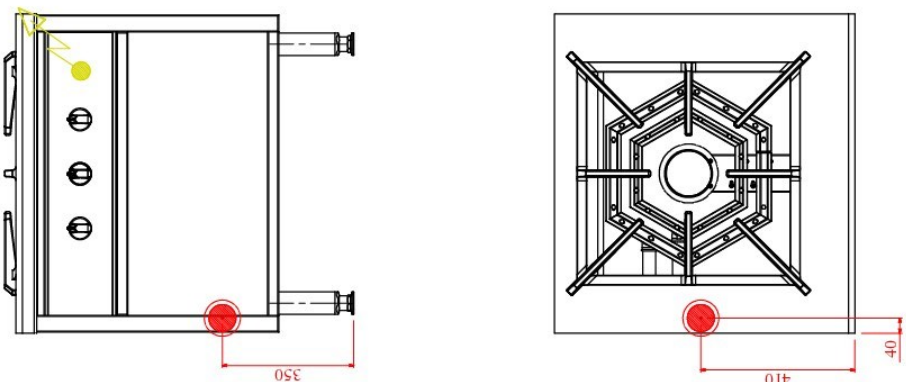
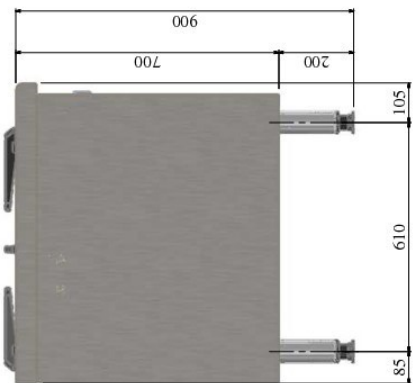
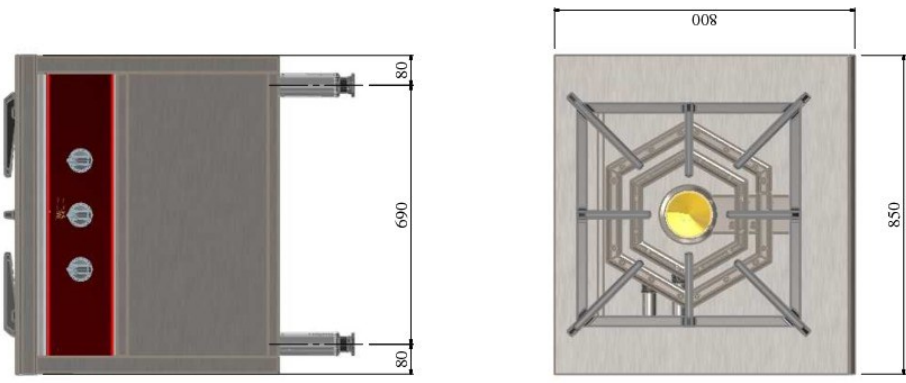

- Gas rating : 24 kW
 - Electrical rating : 0.02 kW / 1~230V+E.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02797	850 X 800 X 900	1~230V+E	GAS : 24 kW	100 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
4 x GN2/1 Electric hot cupboard (2.25kW / 3~400V+E)	V00826
Hinged doors for open base	V01813
-	-
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sage</p>
						
						
						
 <p>Ø 15x21 (1/2") 1~230V + PE Ø 1.50mm²</p>						
<p>V02797 PRO800B-GIFP</p>						

